



Solar for everybody

Product brochure



The power of the sun for the future of our planet

Photo by Nathan Dumiao

Solar for everybody



Photo by Leon Biss

The future is solar for everybody

At Solplanet, we are driven by a simple idea: solar for everybody. We strive to create the best possible experience for distributors, installers and end users. That's why our products are easy-to-install, reliable and user-friendly.

Solplanet photovoltaic inverters are manufactured in compliance with international high-quality standards. Our annual production capacity exceeds 20GW. So, chances are we can meet your demand.

You can depend on Solplanet

Solplanet is a brand of AISWEI, which is formerly known as SMA's Chinese subsidiary and has successfully been manufacturing high-quality and reliable products for renowned brands like SMA and Zegersolar.

Today, AISWEI is a leading R&D and manufacturing company focusing on clean energy. Headquartered in Shanghai, China, with three R&D centers, one manufacturing base, and offices in Asia, Europe, South America, Africa, and Oceania, AISWEI and Solplanet serve customers in many countries and regions across the globe.

Solplanet makes things easy

Solplanet products are easy-to-install, reliable and user-friendly. We offer a variety of quality products with industry leading warranties that you can depend on: single phase inverters, three phase inverters and connect & monitoring products. In addition we also offer our new hybrid inverters.

Easy-to-install Reliable User-friendly

We strive to create the best possible experience for distributors, installers and end users. That's why our products are easy-to-install, reliable and user-friendly.




Easy-to-install

- Quick & easy-to-install with standard tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- Integrated DC switch
- IP rated design for outdoor use




User-friendly

- User friendly app interface
- Online monitoring via Wi-Fi and Solplanet apps
- Award winning inverter design


Our product range:

We offer single phase and three phase inverters alongside our monitoring products:


Single Phase Inverters
Page 8




Energy Storage Batteries
Page 54




Three Phase Inverters
Page 20



Smart EV Charger
Page 64



Hybrid Inverters
Page 38



Connect & Monitor
Page 68




Single phase inverters



Perfect for home
& small business
applications


ASW S-S2 SERIES

ASW600S-S2
ASW800S-S2




ASW S-S SERIES

ASW1000S-S
ASW1500S-S
ASW2000S-S
ASW3000S-S




ASW S SERIES

ASW6000-S
ASW8000-S
ASW10000-S




ASW S-G2 SERIES

ASW1000-S-G2
ASW1500-S-G2
ASW2000-S-G2
ASW2500-S-G2



ASW S-G2 SERIES

ASW3000-S-G2
ASW3680-S-G2
ASW4000-S-G2
ASW5000-S-G2
ASW6000-S-G2



ASW S-S2 Series



Models:
ASW600S-S2
ASW800S-S2




Easy-to-install

- Suitable for PV balcony systems
- Quick and easy to install with basic tools
- Quick setup and commissioning with the Solplanet app
- A4 size, compact and super light weight at 3.9 kg



Reliable

- 250 % PV array oversizing for higher yields
- Integrated DC switch
- Higher yield due to very low 35 V start-up voltage
- IP66 rated design for outdoor use



User-friendly

- 16 A input current, ideal for high-power PV modules
- 24/7 PV plant monitoring via the Solplanet app
- Noise level < 20dB
- ShadeSol shadow management
- Smart meter interface for zero export applications

Technical Datasheet

	ASW600S-S2	ASW800S-S2		
Input (DC)	Max. PV array power	1500 W _p STC	2000 W _p STC	
	Max. input voltage	500V		
	MPP voltage range	35V to 420 V / 360 V		
	Full load MPP voltage range	65 ...400V	65 ...400 V	
	Min. input voltage	30 V		
	Initial. feed in voltage	35 V		
	Max. operating input current	16 A		
	Max. short circuit current	20 A		
	No. of independent MPPT inputs / strings per MPPT input	1 / 1		
	Output (AC)	Rated active power	600 W	800 W
Rated apparent power		600 VA	800 VA	
Max. apparent power		600 VA	800 VA	
AC nominal voltage		230 V		
AC voltage range		180 V to 260 V		
AC grid frequency / range		50 Hz / 45 Hz to 55 Hz		
Rated output current (A)		2.6 A	3.5 A	
Max. output current (A)		2.6 A	3.5 A	
Adjustable power factor range		0.8 leading to 0.8 lagging		
Feed-in phases		1		
Harmonic distortion (THD) at rated output	< 3 %			
Efficiency & Protection	Max. efficiency / European efficiency	97.2 % / 96.5 %		
	DC switch	●		
	Ground fault monitoring / grid monitoring	● / ●		
	DC reverse polarity protection / AC short circuit protection	● / ●		
	All-pole-sensitive residual-current monitoring unit	● / ●		
	Surge protection	● / Type III		
	Anti-Islanding protection	●		
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC : III ; DC : II		
	General data	Dimensions (W / H / D)	288 / 218 / 97mm	
		Weight	3.9kg	
Operating temperature range		-25 °C...+60 °C		
Self-consumption (at night)		< 1 W		
Topology		Non-isolated		
Cooling concept		Natural convection		
Degree of protection (according to IEC 60529)		IP66		
Climatic category (according to IEC 60721-3-4)		4K4H		
Max. permissible value for relative humidity (non-condensing)		100%		
Max. operating altitude		3000 m		
Features	DC connection	Plug-in connector		
	AC connection	Plug-in connector		
	Mounting type	Wall-mount bracket		
	LED indicators (Status / Fault / Communication)	●		
	24/7 monitoring	●		
	Communication interface	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)		
Certificates and approvals (more available on request)	CE / IEC62109-1/IEC62109-2 / VDE-AR-N 4105:2018			

● standard features ○ optional features - not available

ASW S-S Series



Models:
ASW1000S-S
ASW1500S-S
ASW2000S-S
ASW3000S-S



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- Integrated DC switch
- IP65 rated design for outdoor use



User-friendly

- User friendly app interface
- Online monitoring via Wi-Fi and Solplanet apps
- Distinguishable connection interfaces
- ShadeSol shadow management


Technical Datasheet

	ASW1000S-S	ASW1500S-S	ASW2000S-S	ASW3000S-S	
Input (DC)	Max. PV array power	1500 Wp STC	2250 Wp STC	3000 Wp STC	4500 Wp STC
	Max. input voltage	580 V			
	MPP voltage range / rated input voltage	80 V to 550 V / 360 V			
	Min. input voltage	80 V			
	Initial. feed in voltage	100 V			
	Max. operating input current	12 A			
	Max. short circuit current	18 A			
	No. of independent MPPT inputs / strings per MPPT input	1 / 1			
Output (AC)	Rated active power	1000 W	1500 W	2000 W	3000 W
	Rated apparent power	1000 VA	1500 VA	2000 VA	3000 VA
	Max. apparent power	1000 VA	1500 VA	2000 VA	3000 VA
	AC nominal voltage	220 V / 230 V / 240 V			
	AC voltage range	180 V to 290 V			
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz			
	Max. output current	5 A	7.5 A	10 A	13.6 A
	Adjustable power factor range	0.8 leading to 0.8 lagging			
	Feed-in phases	1			
	Harmonic distortion (THD) at rated output	< 3 %			
Efficiency & Protection	Max. efficiency / European efficiency	97.4% / 95.4 %	97.6 % / 96.3 %	97.6 % / 96.8 %	97.6 % / 97.1 %
	DC switch	●			
	Ground fault monitoring / grid monitoring	● / ●			
	DC reverse polarity protection / AC short circuit protection	● / ●			
	All-pole-sensitive residual-current monitoring unit	●			
	Anti-islanding Protection	●			
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC : III ; DC : II			
General data	Dimensions (W / H / D)	320 / 264 / 94 mm			
	Weight	6.5 kg			
	Operating temperature range	-25°C ... +60°C			
	Self-consumption (at night)	< 1 W			
	Topology	Non-isolated			
	Cooling concept	Natural convection			
	Degree of protection (according to IEC 60529)	IP65			
	Climatic category (according to IEC 60721-3-4)	4K4H			
	Max. permissible value for relative humidity (non-condensing)	100%			
	Max. operating altitude	3000 m			
Features	DC connection	Plug-in connector			
	AC connection	Plug-in connector			
	Mounting type	Wall-mount bracket			
	LED indicators (Status / Fault / Communication)	●			
	Communication interface ¹⁾	● / ● / ● / ○ (RS485/Wi-Fi/LAN/4G)			
	Country of manufacture	China			
Certificates and approvals (more available on request)	CE, IEC62109, IEC61000, EN50549, AS/NZS 4777, C10/C11, IEC61727, IEC62116, IEC61683				

● Standard features / ○ optional features / – not available

1- 2-pin RS485 connection to approved smart meters for export power control applications

ASW S Series

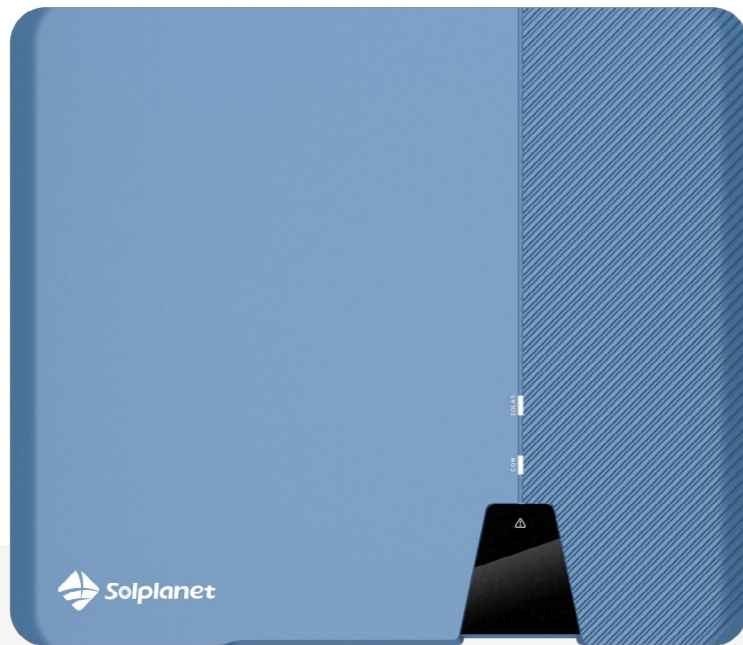

Models:
ASW6000-S
ASW8000-S
ASW10000-S



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- Integrated DC switch
- IP66 rated design for outdoor use



User-friendly

- 16 A input current, compatible with bifacial and large area PV modules
- 3 MPPTs for flexible PV array design
- ShadeSol shadow management

Technical Datasheet

	ASW6000-S	ASW8000-S	ASW10000-S	
Input (DC)	Max. PV array power	9000 Wp STC	12000 Wp STC	15000 Wp STC
	Max. input voltage	600V		
	MPP voltage range / rated input voltage	80 V - 560 V / 360 V		
	Min. input voltage	80 V		
	Initial. feed in voltage	100 V		
	Max. operating input current	16 A		
	Max. short circuit current	22.5 A		
	No. of independent MPPT inputs / strings per MPPT input	3 / 1		
Output (AC)	Rated active power	6000 W	8000 W	10000 W
	Rated apparent power	6000 VA	8000 VA	10000 VA
	Max. apparent power	6000 VA	8000 VA	10000 VA
	AC nominal voltage	220 V / 230 V / 240 V		
	AC voltage range	180 V to 295 V		
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz		
	Max. output current	30 A	40 A	50 A
	Adjustable power factor range	0.8 leading to 0.8 lagging		
Efficiency & Protection	Feed-in phases	1		
	Harmonic distortion (THD) at rated output	< 3%		
	Max. efficiency / European efficiency	97.7 % / 97.3 %		
	DC switch	●		
	Ground fault monitoring / grid monitoring	● / ●		
	DC reverse polarity protection / AC short circuit protection	● / ●		
	All-pole-sensitive residual-current monitoring unit	●		
	Anti-Islanding protection	●		
General data	Surge protection	● / Type II		
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II		
	Dimensions (W / H / D)	503 / 435 / 183 mm		
	Weight	< 19 kg		
	Operating temperature range	-25°C ... +60°C		
	Self-consumption (at night)	< 1 W		
	Topology	Non-isolated		
	Cooling concept	Natural convection		
Features	Degree of protection (according to IEC 60529)	IP66		
	Climatic category (according to IEC 60721-3-4)	4K4H		
	Max. permissible value for relative humidity (non-condensing)	100%		
	Max. operating altitude	3000 m		
Features	DC connection	Plug-in connector		
	AC connection	Plug-in connector		
	Mounting type	Wall-mount bracket		
	LED indicators (Status / Fault / Communication)	●		
	24/7 monitoring	●		
	Communication interface ¹	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)		
	Country of manufacture	China		
	Certificates and approvals (more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, AS/NZS4777, C10/C11		


● Standard features / ○ optional features / – not available

Data at nominal conditions. All information is subject to change.

1) 2-pin RS485 to approved smart meters for export power control applications

Single phase inverters 1 to 2.5 kW

ASW S-G2 Series

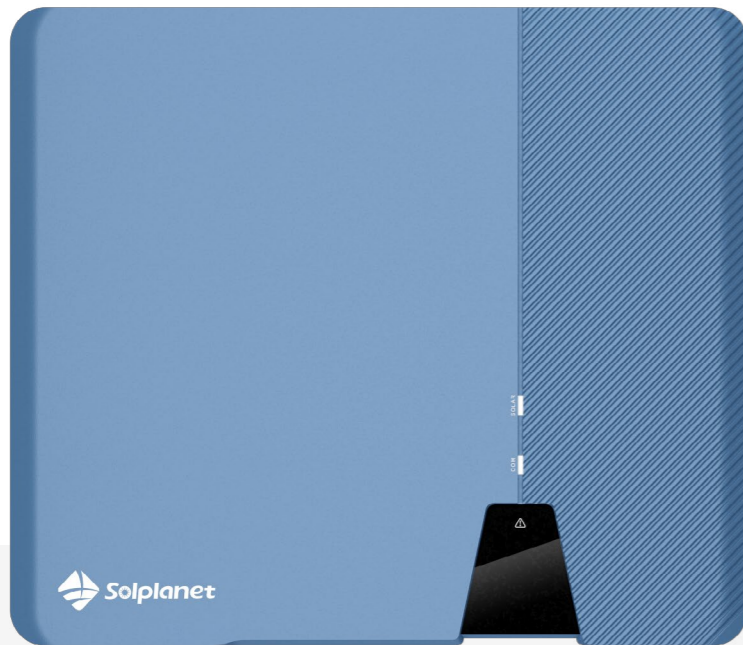

Models:
ASW1000-S-G2
ASW1500-S-G2
ASW2000-S-G2
ASW2500-S-G2



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- Integrated DC switch
- IP66 rated design for outdoor use



User-friendly

- 16 A input current, compatible with bifacial and large area PV modules
- Optional AC Power Supply
- ShadeSol shadow management
- Support anti-backflow function

Technical Datasheet


	ASW1000-S-G2	ASW1500-S-G2	ASW2000-S-G2	ASW2500-S-G2	
Input (DC)	Max. PV array power	1500 Wp STC	2250 Wp STC	3000 Wp STC	
	Max. input voltage	600 V	600 V	600 V	
	MPP voltage range	60 V to 560 V / 360 V			
	Full load MPP voltage range	200-500V			
	Min. input voltage	60 V			
	Initial. feed in voltage	100 V			
	Max. operating input current	16 A			
	Max. short circuit current	24 A			
	No. of independent MPPT inputs / strings per MPPT input	1 / 1			
Output (AC)	Rated active power	1000 W	1500 W	2000 W	
	Rated apparent power	1000 VA	1500 VA	2000 VA	
	Max. apparent power	1000 VA	1500 VA	2000 VA	
	AC nominal voltage	220 V / 230 V / 240 V			
	AC voltage range	180 V to 295 V			
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz			
	Max. output current (A)	5A	7.5 A	10 A	
	Adjustable power factor range	0.8 leading to 0.8 lagging			
	Feed-in phases	1			
Efficiency & Protection	Harmonic distortion (THD) at rated output	<3%			
	Max. efficiency / European efficiency	97.6% / 97.1%			
	DC switch	●			
	Ground fault monitoring / grid monitoring	● / ●			
	DC reverse polarity protection / AC short circuit protection	● / ●			
	All-pole-sensitive residual-current monitoring unit	●			
	Arc fault circuit interrupter (AFCI)	○			
	Anti-Islanding protection	●			
	Surge protection	● / Type II			
General data	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II			
	Dimensions (W / H / D)	368*325*145 mm			
	Weight	9.5 kg			
	Operating temperature range	-25°C ... +60°C			
	Self-consumption (at night)	< 1W			
	Topology	Non-isolated			
	Cooling concept	Natural convection			
	Degree of protection (according to IEC 60529)	IP66			
	Climatic category (according to IEC 60721-3-4)	4K4H			
Max. permissible value for relative humidity (non-condensing)	100%				
Max. operating altitude	4000 m				
Features	DC connection	Plug-in connector			
	AC connection	Plug-in connector			
	Mounting type	Wall-mount bracket			
	LED indicators (Status / Fault / Communication)	●			
	24/7 monitoring	●			
	Communication interface ¹⁾	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)			
	Country of manufacture	China			
Certificates and approvals(more available on request)	IEC 62109-1/2, EN50549-1, C10/C11,VDE-AR-N 4105				

● Standard features / ○ optional features / – not available

Data at nominal conditions. All information is subject to change.

1) Zero export installations supported with 2-pin RS485 for connection to approved smart meters.

ASW S-G2 Series

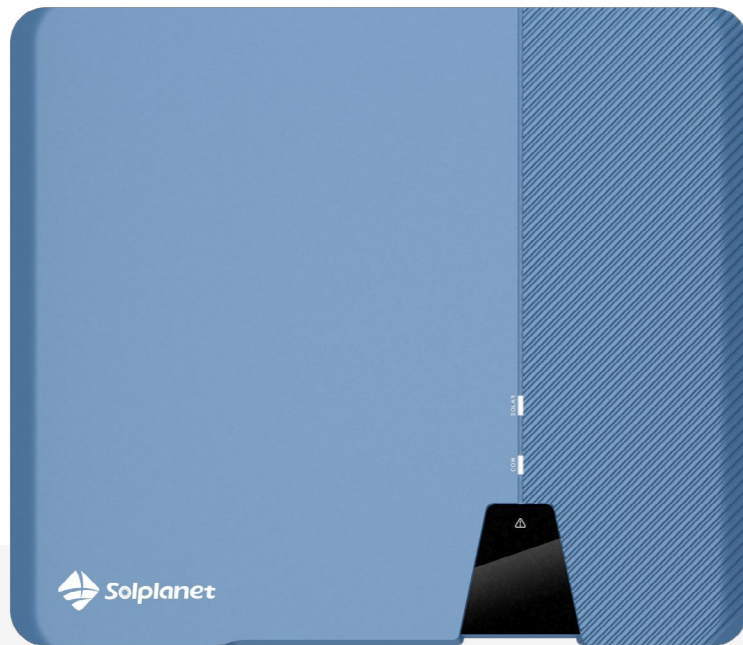

Models:
 ASW3000-S-G2
 ASW3680-S-G2
 ASW4000-S-G2
 ASW5000-S-G2
 ASW6000-S-G2



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- Integrated DC switch
- IP66 rated design for outdoor use



User-friendly

- 16 A input current, compatible with bifacial and large area PV modules
- Optional AC Power Supply
- ShadeSol shadow management
- Support anti-backflow function
- 2 MPPTs for flexible PV array design

Technical Datasheet

ASW3000-S-G2 ASW3680-S-G2 ASW4000-S-G2 ASW5000-S-G2 ASW6000-S-G2

	ASW3000-S-G2	ASW3680-S-G2	ASW4000-S-G2	ASW5000-S-G2	ASW6000-S-G2	
Input (DC)	Max. PV array power	4500 Wp STC	5520 Wp STC	6000 Wp STC	9000 Wp STC	
	Max. input voltage	600V				
	MPP voltage range / rated input voltage	60V-560V/360V				
	Min. input voltage	60V				
	Initial. feed in voltage	100V				
	Max. operating input current	16A				
	Max. short circuit current	24A				
	No. of independent MPPT inputs / strings per MPPT input	2/1				
Output (AC)	Rated active power	3000 W	3680 W	4000 W	5000 W	6000 W
	Rated apparent power	3000 VA	3680 VA	4000 VA	5000 VA	6000 VA
	Max. apparent power	3000 VA	3680 VA	4000 VA	5000 VA	6000 VA
	AC nominal voltage	220 V / 230 V / 240 V				
	AC voltage range	180 V to 295 V				
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz				
	Max. output current	15A	16A	20A	25A	30A
	Adjustable power factor range	1 / 0.8 leading ... 0.8 lagging				
	Feed-in phases	1				
	Harmonic distortion (THD) at rated output	< 3%				
Efficiency & Protection	Max. efficiency / European efficiency	98.2% / 97.5%				
	DC switch	●				
	Ground fault monitoring / grid monitoring	● / ●				
	DC reverse polarity protection / AC short circuit Protection	● / ●				
	All-pole-sensitive residual-current monitoring unit	●				
	Surge protection	● / Type II				
	Arc fault circuit interrupter (AFCI)	○				
	Anti-Islanding protection	●				
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II				
	Dimensions (W / H / D)	368*325*145 mm				
General data	Weight	9.5 kg				
	Operating temperature range	-25°C ... +60°C				
	Self-consumption (at night)	< 1 W				
	Topology	Non-isolated				
	Cooling concept	Natural Convection				
	Degree of protection (according to IEC 60529)	IP66				
	Climatic category (according to IEC 60721-3-4)	4K4H				
	Max. permissible value for relative humidity (non-condensing)	100%				
	Max. operating altitude	4000 m				
	Features	DC connection	Plug-in connector			
AC connection		Plug-in Connector				
Mounting type		Wall-mount bracket				
LED Indicators (Status / Fault / Communication)		●				
24/7 monitoring		●				
Communication interface ¹		●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)				
Country of manufacture		China				
Certificates and approvals(more available on request)		AS/NZS 4777.2, IEC 62109-1/2, IEC 61727, IEC 62116, NB/T32004				

● standard features ○ optional features - not available


Data at nominal conditions. All information is subject to change.

1) Zero export installations supported with 2-pin RS485 for connection to approved smart meters

Three phase inverters




High yield, reliable residential and commercial inverters




ASW LT-G2 Pro SERIES
ASW3K / 4K / 5K / 6K / 8K /
10K-LT-G2 Pro
ASW12K / 13K / 15K / 17K /
20K-LT-G2 Pro

ASW LT-G2 SERIES
ASW8K / 10K / 12K / 15K / 17K /
20K-LT-G2




ASW LT-G3 SERIES
ASW25K / 27K / 30K / 33K /
36K / 40K-LT-G3



ASW LT-G2 SERIES
ASW30K / 33K / 36K / 40K / 45K /
50K-LT-G2

ASW LT-G2 Pro SERIES
ASW40K / 45K / 50K-LT-G2 Pro


ASW LT-G3 SERIES
ASW45K / 50K / 60K-LT-G3



ASW LT SERIES
ASW75K / 80K / 100K / 110K-LT

Three phase inverters 3 to 10 kW

ASW LT-G2 Pro Series

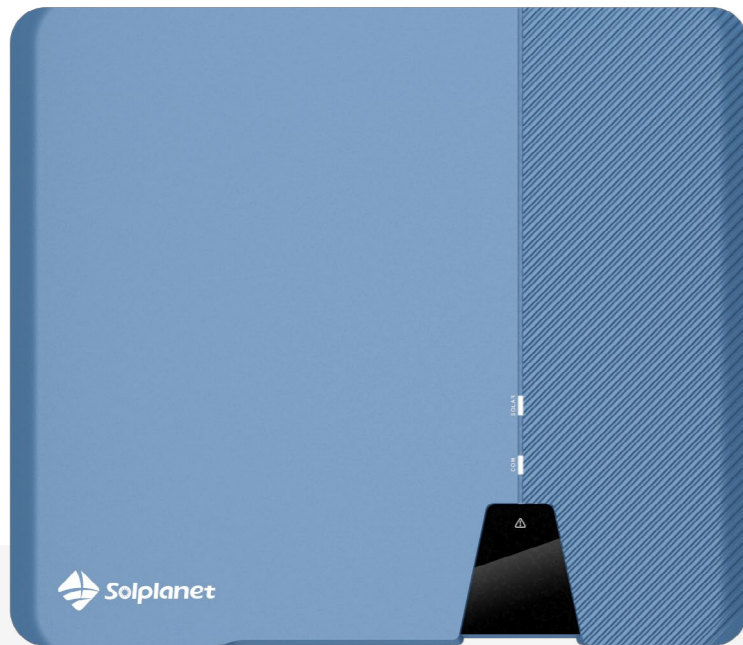

Models:
 ASW3K-LT-G2 Pro
 ASW4K-LT-G2 Pro
 ASW5K-LT-G2 Pro
 ASW6K-LT-G2 Pro
 ASW8K-LT-G2 Pro
 ASW10K-LT-G2 Pro



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- User friendly app interface
- Max.20 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V
- ShadeSol shadow management

Technical Datasheet

	ASW 3K-LT-G2 Pro	ASW 4K-LT-G2 Pro	ASW 5K-LT-G2 Pro	ASW 6K-LT-G2 Pro	ASW 8K-LT-G2 Pro	ASW 10K-LT-G2 Pro	
Input (DC)	Max. PV array power	4500 Wp STC	6000 Wp STC	7500 Wp STC	9000 Wp STC	12000 WpSTC	
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	150 V to 1000 V / 630 V					
	Min. input voltage	125 V					
	Initial. feed-in voltage	180 V					
	Max. operating input current	16 A / 16 A			20A / 16 A		
	Max. short circuit current	25 A / 25 A			30 A / 25 A		
No. of independent MPPT inputs / strings per MPPT input	2 / A :1 ; B : 1						
Output (AC)	Rated active power	3000 W	4000 W	5000 W	6000 W	8000 W	
	Rated apparent power	3000 VA	4000 VA	5000 VA	6000 VA	8000 VA	
	Max. apparent power	3000 VA	4000 VA	5000 VA	6000 VA	8000 VA	
	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V					
	AC voltage range	160 V to 300 V					
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz					
	Max. output current	4.8A	6.4 A	8.0 A	9.6 A	12.8 A	
	Adjustable power factor range	0.8 leading to 0.8 lagging					
	Feed-in phases	3 / 3-N-PE					
	Harmonic distortion (THD) at rated output	< 3%					
Efficiency & Protection	Max. efficiency / European efficiency	98.3 % / 97.9 %			98.6% / 98.2 %		
	DC Switch	●					
	Ground fault monitoring / grid monitoring	● / ●					
	DC reverse polarity protection / AC short circuit protection	● / ●					
	All-pole-sensitive residual-current monitoring unit	●					
	Arc fault circuit interrupter (AFCI)	○					
	Anti-Islanding protection	●					
	Surge protection	● / Type II					
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC : III ; DC : II					
	Dimensions (W / H / D)	503 / 435 / 183 mm					
General data	Weight	16 kg					
	Operating temperature range	-25°C ... +60°C					
	Self-consumption (at night)	< 1 W					
	Topology	Non-isolated					
	Cooling concept	Natural Convection					
	Degree of protection (according to IEC 60529)	IP66					
	Climatic category (according to IEC 60721-3-4)	4K4H					
	Max. permissible value for relative humidity (non-condensing)	100 %					
	Max. operating altitude	3000 m					
	Features	DC connection	Plug-in connector				
AC connection		Plug-in connector					
Mounting type		Wall-mount bracket					
LED indicators (Status / Fault / Communication)		●					
24/7 monitoring		●					
Communication interface ¹		●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)					
Country of Manufacture		China					
Certificates and approvals (more available on request)	CE, EN50549, G98/99, VDE-AR-N4105, AS/NZS 4777, C10/C11, VFR 2014 & UTE C15, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, NB/T 32004						


● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

Data at nominal conditions. All information is subject to change.

Three phase inverters 12 to 20 kW

ASW LT-G2 Pro Series

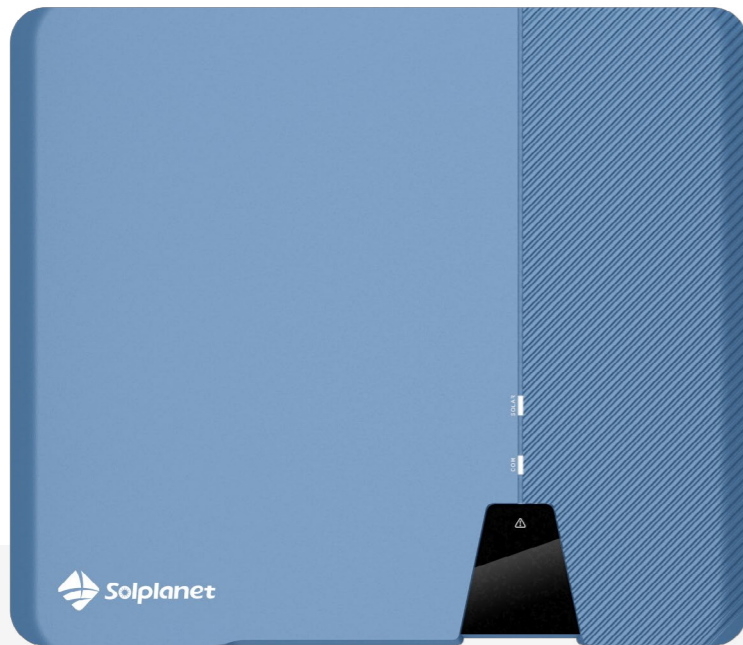

Models:
 ASW12K-LT-G2 Pro
 ASW13K-LT-G2 Pro
 ASW15K-LT-G2 Pro
 ASW17K-LT-G2 Pro
 ASW20K-LT-G2 Pro



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- User friendly app interface
- 20 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V
- ShadeSol shadow management

Technical Datasheet

	ASW 12K-LT-G2 Pro	ASW 13K-LT-G2 Pro	ASW 15K-LT-G2 Pro	ASW 17K-LT-G2 Pro	ASW 20K-LT-G2 Pro	
Input (DC)	Max. PV array power	18000 Wp STC	19500Wp STC	22500 Wp STC	30000 Wp STC	
	Max. input voltage	1100 V				
	MPP voltage range / rated input voltage	150 V to 1000 V / 630 V				
	Min. input voltage	125 V				
	Initial. feed-in voltage	180 V				
	Max. operating input current	32 A / 20 A	32 A / 20 A	32 A / 20 A	32 A / 32 A	32 A / 32 A
Input (DC)	Max. short circuit current	48 A / 30 A	48 A / 30A	48 A / 30 A	48 A / 48 A	48 A / 48 A
	No. of independent MPPT inputs / strings per MPPT input	2 / A:2;B:1	2 / A:2;B:1	2/A:2;B:1	2 / A:2;B:2	2 / A:2;B:2
Output (AC)	Rated active power	12000 W	13000 W	15000 W	17000 W	20000 W
	Rated apparent power	12000 VA	13000 VA	15000 VA	17000 VA	20000 VA
	Max. apparent power	12000 VA	13000 VA	15000 VA	17000 VA	20000 VA
Output (AC)	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V				
	AC voltage range	160 V to 300 V				
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz				
Output (AC)	Max. output current	19.1 A	20.7 A	24 A	27.1 A	31.9 A
	Adjustable power factor range	0.8 leading to 0.8 lagging				
	Feed-in phases	3 / 3-N-PE				
Efficiency & Protection	Harmonic distortion (THD) at rated output	< 3 %				
	Max. efficiency / European efficiency	98.6% / 98.2 %				
	DC Switch	●				
	Ground fault monitoring / grid monitoring	● / ●				
	DC reverse polarity protection / AC short circuit protection	● / ●				
	All-pole-sensitive residual-current monitoring unit	●				
	Arc fault circuit interrupter (AFCI)	○				
	Anti-Islanding protection	●				
	Surge protection	● / Type II				
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I/AC: III; DC :II				
General data	Dimensions (W / H / D)	503 / 435 / 183 mm				
	Weight	17 kg				
	Operating temperature range	-25°C ... +60°C				
	Self-consumption (at night)	< 1 W				
	Topology	Non-isolated				
	Cooling concept	Active cooling				
	Degree of protection (according to IEC 60529)	IP66				
	Climatic category (according to IEC 60721-3-4)	4K4H				
	Max. permissible value for relative humidity (non-condensing)	100%				
	Max. operating altitude	3000 m				
Features	DC connection	Plug-in connector				
	AC connection	Plug-in connector				
	Mounting type	Wall-mount bracket				
	LED indicators (Status / Fault / Communication)	●				
	24/7 monitoring	●				
	Communication interface ¹⁾	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)				
	Country of manufacture	China				
Certificates and approvals (more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, AS/NZS4777, C10/C11					


● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

Data at nominal conditions. All information is subject to change.

Three phase inverters 8 to 20 kW

ASW LT-G2 Series

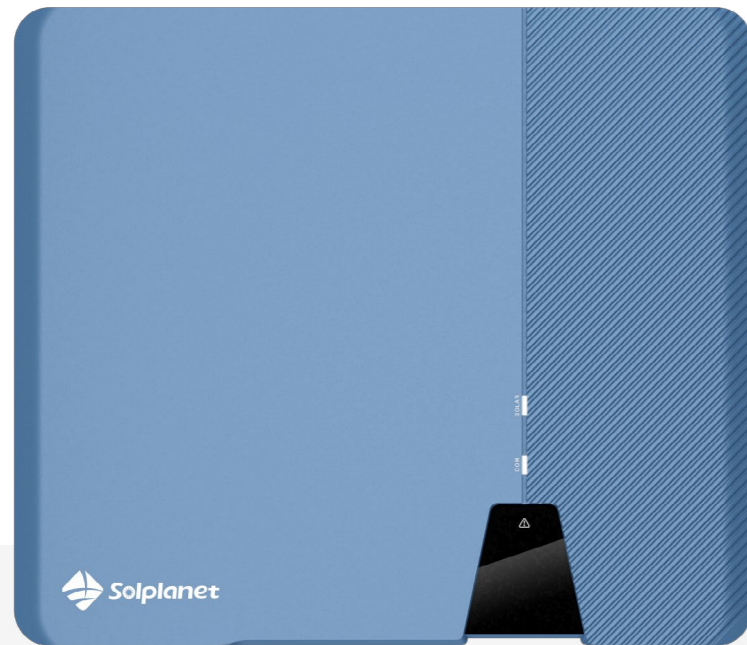

Models:
 ASW8K-LT-G2
 ASW10K-LT-G2
 ASW12K-LT-G2
 ASW15K-LT-G2
 ASW17K-LT-G2
 ASW20K-LT-G2



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- User friendly app interface
- 13 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V
- ShadeSol shadow management


Technical Datasheet

	ASW 8K-LT-G2	ASW 10K-LT-G2	ASW 12K-LT-G2	ASW 15K-LT-G2	ASW 17K-LT-G2	ASW 20K-LT-G2	
Input (DC)	Max. PV array power	12000 Wp STC	15000 Wp STC	18000 Wp STC	22500 Wp STC	30000 Wp STC	
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	150 V to 1000 V / 630 V					
	Min. input voltage	125 V					
	Initial. feed-in voltage	150 V					
	Max. operating input current	26 A / 13 A	26 A / 13 A	26 A / 26 A	26A/26A	26A/26A	
	Max. short circuit current	40 A / 20 A	40 A / 20 A	40 A / 40 A	40A /40 A	40A/40A	
	No. of independent MPPT inputs /strings per MPPT input	2 / A:1;B:1	2 / A:1;B:1	2 / A:2;B:1	2/A:2;B:1	2 / A:2;B:2	2 / A:2;B:2
Output (AC)	Rated active power	8000 W	10000 W	12000 W	15000 W	17000 W	20000 W
	Rated apparent power	8000 VA	10000 VA	12000 VA	15000 VA	17000 VA	20000 VA
	Max. apparent power	8000 VA	10000 VA	12000 VA	15000 VA	17000 VA	20000 VA
Efficiency & Protection	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V					
	AC voltage range	160 V to 300 V					
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz					
	Max. output current	12.8 A	16 A	19.1 A	24 A	27.1 A	31.9 A
	Adjustable power factor range	0.8 leading to 0.8 lagging					
	Feed-in phases	3 / 3-N-PE					
	Harmonic distortion (THD) at rated output	<3 %					
General data	Max. efficiency / European efficiency	98.6 % / 98.2 %					
	DC Switch	●					
	Ground fault monitoring / grid monitoring	● / ●					
	DC reverse polarity protection / AC short circuit protection	● / ●					
	All-pole-sensitive residual-current monitoring unit	●					
	Anti-Islanding protection	●					
	Surge protection	● / Type II					
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II					
	Dimensions (W / H / D)	503 / 435 / 183 mm					
	Weight	16 kg	17 kg				
Features	Operating temperature range	-25°C ... +60°C					
	Self-consumption (at night)	< 1 W					
	Topology	Non-isolated					
	Cooling concept	Natural convection	Active cooling				
	Degree of protection (according to IEC 60529)	IP66					
	Climatic category (according to IEC 60721-3-4)	4K4H					
	Max. permissible value for relative humidity (non-condensing)	100%					
	Max. operating altitude	3000 m					
	DC connection	Plug-in connector					
	AC connection	Plug-in connector					
Mounting type	Wall-mount bracket						
LED indicators (Status / Fault / Communication)	●						
Communication interface	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)						
Country of manufacture	China						
Certificates and approvals (more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, AS/NZS4777, C10/C11						

● Standard features / ○ optional features / – not available
 Data at nominal conditions. All information is subject to change.

Three phase inverters 25 to 40 kW

ASW LT-G3 Series

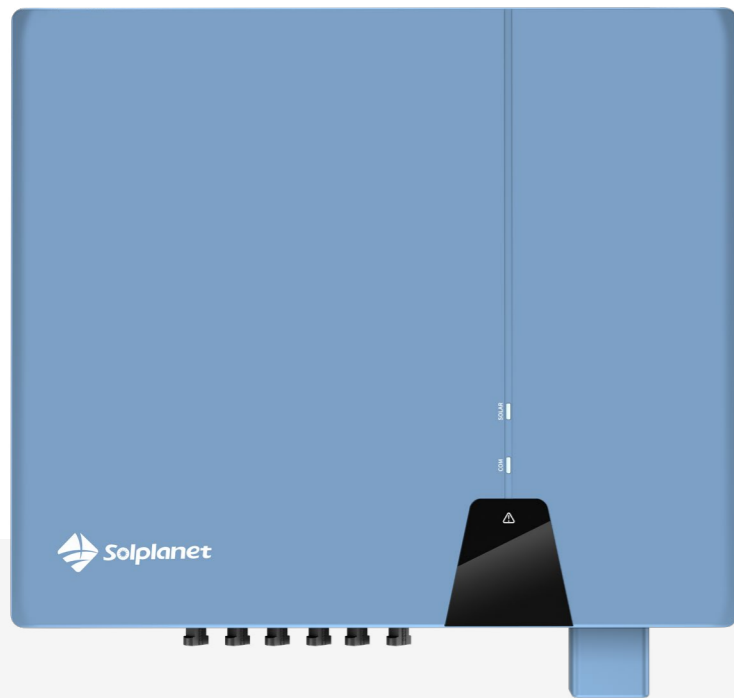

Models:
 ASW25K-LT-G3
 ASW27K-LT-G3
 ASW30K-LT-G3
 ASW33K-LT-G3
 ASW36K-LT-G3
 ASW40K-LT-G3



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- 20A input current, ideal for bifacial and large area PV modules
- 3 MPPTs for flexible PV array design
- Wide MPP voltage range 180V-1000V
- ShadeSol shadow management

Technical Datasheet

	ASW 25K-LT-G3	ASW 27K-LT-G3	ASW 30K-LT-G3	ASW 33K-LT-G3	ASW 36K-LT-G3	ASW 40K-LT-G3	
Input (DC)	Max. PV array power	37500 Wp STC	40500 Wp STC	45000 Wp STC	49500 Wp STC	60000 Wp STC	
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	180 V - 1000 V / 630 V					
	Min. input voltage	160 V					
	Initial. feed-in voltage	200 V					
	Max. operating input current	32A / 32 A / 32A			32A / 32 A / 40A		
	Max. short circuit current	48 A / 48A / 48A			48 A / 48A / 60A		
No. of independent MPPT inputs / strings per MPPT input	3 / A:2;B:2;C:2			3 / A:2;B:2;C:2			
Output (AC)	Rated active power	25000W	27000W	30000W	33000W	36000W	40000W
	Rated apparent power	25000 VA	27000 VA	30000 VA	33000 VA	36000 VA	40000 VA
	Max. apparent power	25000 VA	27000 VA	30000 VA	33000 VA	36000 VA	40000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V					
	AC voltage range	180 V to 305 V / 312 V to 528V					
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz					
	Max. output current	39.9A	43.0A	47.8A	52.6A	57.4A	63.8A
	Adjustable power factor range	0.8 leading to 0.8 lagging					
	Feed-in phases	3 / 3-N-PE					
	Harmonic distortion (THD) at rated output	< 3%					
	Efficiency & Protection	Max. efficiency / European efficiency	98.4% / 98.2%				
		DC Switch	●				
		Ground fault monitoring / grid monitoring	● / ●				
DC reverse polarity protection / AC short circuit protection		● / ●					
All-pole-sensitive residual-current monitoring unit		●					
Arc fault circuit interrupter (AFCI)		○					
Anti-islanding Protection		●					
Surge protection		● / Type II					
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)		I / AC: III; DC: II					
Dimensions (W / H / D)		543 / 520 / 235 mm					
General data	Weight	29 kg		30 kg			
	Operating temperature range	-25°C ... +60°C					
	Self-consumption (at night)	< 1 W					
	Topology	Non-isolated					
	Cooling concept	Active cooling					
	Degree of protection (according to IEC 60529)	IP66					
	Climatic category (according to IEC 60721-3-4)	4K4H					
	Max. permissible value for relative humidity (non-condensing)	100 %					
	Max. operating altitude	3000 m					
	Features	DC connection	Plug-in connector				
AC connection		Plug-in connector					
Mounting type		Wall-mount bracket					
LED Indicators (Status / Fault / Communication)		●					
24/7 monitoring		●					
Communication interface ¹		● / ● / ● / ○ (RS485 / Wi-Fi / LAN / 4G)					
Country of manufacture		China					
Certificates and approvals (more available on request)	CE, EN50549 ,IEC62109, IEC62116, IEC61727, IEC61000, NB/T 32004						

● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

ASW LT-G2 Series



Models:
 ASW30K-LT-G2
 ASW33K-LT-G2
 ASW36K-LT-G2
 ASW40K-LT-G2
 ASW45K-LT-G2
 ASW50K-LT-G2



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- 13 A input current, ideal for bifacial and large area PV modules
- 5 MPPTs for flexible PV array design
- Wide MPP voltage range 200V-1000V
- ShadeSol shadow management

Technical Datasheet

	ASW 30K-LT-G2	ASW 33K-LT-G2	ASW 36K-LT-G2	ASW 40K-LT-G2	ASW 45K-LT-G2	ASW 50K-LT-G2	
Input (DC)	Max. PV array power	45000 Wp STC	49500 Wp STC	54000 Wp STC	60000 Wp STC	75000 Wp STC	
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	200 V to 1000 V / 630 V					
	Min. input voltage	200 V					
	Initial. feed-in voltage	250 V					
	Max. operating input current	26 A					
	Max. short circuit current	40 A					
	No. of independent MPPT inputs / strings per MPPT input	3 / 2	3 / 2	3 / 2	4 / 2	4 / 2	5 / 2
Output (AC)	Rated active power	30000 W	33000 W	36000 W	40000 W	45000 W	50000 W
	Rated apparent power	30000 VA	33000 VA	36000 VA	40000 VA	45000 VA	50000 VA
	Max. apparent power	30000 VA	33000 VA	36000 VA	40000 VA	45000 VA	50000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V					
	AC voltage range	180-305 V / 312-528 V					
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz					
	Max. output current	50.0 A	55.0 A	60.0 A	66.7 A	75.0 A	80.0 A
	Adjustable power factor range	0.8 leading to 0.8 lagging					
	Feed-in phases	3 / 3-N-PE					
	Harmonic distortion (THD) at rated output	< 3%					
Efficiency & Protection	Max. efficiency / European efficiency	98.6% / 98.3%					
	DC switch	●					
	Ground fault monitoring / grid monitoring	● / ●					
	DC reverse polarity protection / AC short circuit protection	● / ●					
	All-pole-sensitive residual-current monitoring unit	●					
	Anti-islanding Protection	●					
	Surge protection	● / Type II					
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II					
	General data	Dimensions (W / H / D)	670 / 580 / 270 mm				
Weight		43 kg					
Operating temperature range		-25°C ... +60°C					
Self-consumption (at night)		< 1 W					
Topology		Non-isolated					
Cooling concept		Active cooling					
Degree of protection (according to IEC 60529)		IP66					
Climatic category (according to IEC 60721-3-4)		4K4H					
Max. permissible value for relative humidity (non-condensing)		100 %					
Max. operating altitude		3000 m					
Features	DC connection	Plug-in connector					
	AC connection	OT connector					
	Mounting type	Wall-mount bracket					
	LED indicators (Status / Fault / Communication)	●					
	Communication interface	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)					
	Country of manufacture	China					
Certificates and approvals(more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC61000, NB/T 32004						

● Standard features / ○ optional features / – not available
 Data at nominal conditions. All information is subject to change.

Three phase inverters 40 to 50 kW

ASW LT-G2 Pro Series



Models:
ASW40K-LT-G2 Pro
ASW45K-LT-G2 Pro
ASW50K-LT-G2 Pro



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- 16 A input current, ideal for bifacial and large area PV modules
- 5 MPPTs for flexible PV array design
- Wide MPP voltage range 200V-1000V
- ShadeSol shadow management

Technical Datasheet

	ASW40K-LT-G2 Pro	ASW45K-LT-G2 Pro	ASW50K-LT-G2 Pro	
Input (DC)	Max. PV array power	60000 Wp STC	67500 Wp STC	75000 Wp STC
	Max. input voltage	1100 V		
	MPP voltage range / rated input voltage	200 V - 1000 V / 630 V		
	Min. input voltage	200 V		
	Initial. feed-in voltage	250 V		
	Max. operating input current	32A		
	Max. short circuit current	48A		
	No. of independent MPPT inputs / strings per MPPT input	4 / 2	4 / 2	5 / 2
Output (AC)	Rated active power	40000 W	45000 W	50000 W
	Rated apparent power	40000 VA	45000 VA	50000 VA
	Max. apparent power	40000 VA	45000 VA	50000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V		
	AC voltage range	180 V to 305 V / 312 V to 528 V		
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz		
	Max. output current	66.7 A	75.0 A	80.0 A
	Adjustable power factor range	0.8 leading to 0.8 lagging		
Efficiency & Protection	Feed-in phases	3 / 3-N-PE		
	Harmonic distortion (THD) at rated output	< 3%		
	Max. efficiency / European efficiency	98.6% / 98.3%		
	DC switch	●		
	Ground fault monitoring / grid monitoring	● / ●		
	DC reverse polarity protection / AC short circuit protection	● / ●		
	All-pole-sensitive residual-current monitoring unit	●		
	Anti-islanding Protection	●		
General data	Surge protection	● / Type II		
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II		
	Dimensions (W / H / D)	670 / 640 / 270 mm		
	Weight	43 kg		
	Operating temperature range	-25°C ... +60°C		
	Self-consumption (at night)	< 1 W		
	Topology	Non-isolated		
	Cooling concept	Active cooling		
Features	Degree of protection (according to IEC 60529)	IP66		
	Climatic category (according to IEC 60721-3-4)	4K4H		
	Max. permissible value for relative humidity (non-condensing)	100%		
	Max. operating altitude	3000 m		
	DC connection	Plug-in connector		
AC connection	OT connector			
Mounting type	Wall-mount bracket			
LED indicators (Status / Fault / Communication)	●			
Communication interface	● / ● / ● / ○ (RS485 / Wi-Fi / LAN / 4G)			
Country of manufacture	China			
Certificates and approvals (more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC61000, NB/T 32004			

● Standard features / ○ optional features / – not available
Data at nominal conditions. All information is subject to change.

Three phase inverters 45 to 60 kW

ASW LT-G3 Series



Models:
ASW45K-LT-G3
ASW50K-LT-G3
ASW60K-LT-G3



Easy-to-install

- Phoenix Contact connectors for reliable tool-free DC connection
- Compact wall mount design
- Fuse-free design thereby reducing BOS cost
- Setup, commissioning and monitoring via the Solplanet app



Higher Yields

- 150 % PV array oversizing for higher yields
- Up to 5 MPPT's for flexible PV array design
- Max. 20 A input current per string, ideal for bifacial and large area PV modules
- ShadeSol - improved generation under non-ideal conditions



Reliable & Safe

- Type II AC & DC Surge Protection
- Integrated DC switches
- IP66 rated design for outdoor use

Technical Datasheet


	ASW45K-LT-G3	ASW50K-LT-G3	ASW60K-LT-G3	
Input (DC)	Max. PV array power	67500 Wp STC	75000 Wp STC	90000 Wp STC
	Max. input voltage	1100 V		
	MPP voltage range / rated input voltage	200 V - 1000 V / 630 V		
	Min. input voltage	200 V		
	Initial. feed-in voltage	250 V		
	Max. operating input current	40 A / 32 A / 32 A / 40 A	40 A / 32 A / 32 A / 40 A / 32 A	40 A / 32 A / 32 A / 40 A / 32 A
	Max. short circuit current	60 A / 48 A / 48 A / 60 A	60 A / 48 A / 48 A / 60 A / 48 A	60 A / 48 A / 48 A / 60 A / 48 A
No. of independent MPPT inputs / strings per MPPT input	4 / 2	5 / 2	5 / 2	
Output (AC)	Rated active power	45000 W	50000 W	60000 W
	Rated apparent power	45000 VA	50000 VA	60000 VA
	Max. apparent power	45000 VA	50000 VA	60000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V		
	AC voltage range	180 V to 305 V / 312 V to 528 V		
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz		
	Max. output current	75.2 A	83.6 A	95.3 A
	Adjustable power factor range	0.8 leading to 0.8 lagging		
	Feed-in phases	3 / 3-N-PE		
	Harmonic distortion (THD) at rated output	< 3%		
Efficiency & Protection	Max. efficiency / European efficiency	98.6% / 98.3%		
	DC switch	●		
	Ground fault monitoring / grid monitoring	● / ●		
	DC reverse polarity protection / AC short circuit protection	● / ●		
	All-pole-sensitive residual-current monitoring unit	●		
	Arc fault circuit interrupter (AFCI)	○		
	Anti-islanding Protection	●		
	Surge protection	● / Type II		
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II		
	Sunspec protocol	●		
General data	Dimensions (W / H / D)	670 / 640 / 270 mm		
	Weight	42.5 kg		
	Operating temperature range	-25°C ... +60°C		
	Self-consumption (at night)	< 1 W		
	Topology	Non-isolated		
	Cooling concept	Active cooling		
	Degree of protection (according to IEC 60529)	IP66		
	Climatic category (according to IEC 60721-3-4)	4K4H		
	Relative humidity (non-condensing)	100%		
	Max. operating altitude	4000 m		
Features	DC connection	Plug-in connector		
	AC connection	OT/DT Connector		
	Mounting type	Wall-mount bracket		
	LED indicators (Status / Fault / Communication)	●		
	24/7 monitoring	●		
	Communication interface	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)		
	Country of manufacture	China		
Certificates and approvals (more available on request)	CE, IEC 62109-1/2, IEC 61727, IEC 62116, IEC 61683, G98/G99, VDE 4110, VED 4105, EN 50549-1/2			

● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

Three phase inverters 75 to 110 kW

ASW LT Series

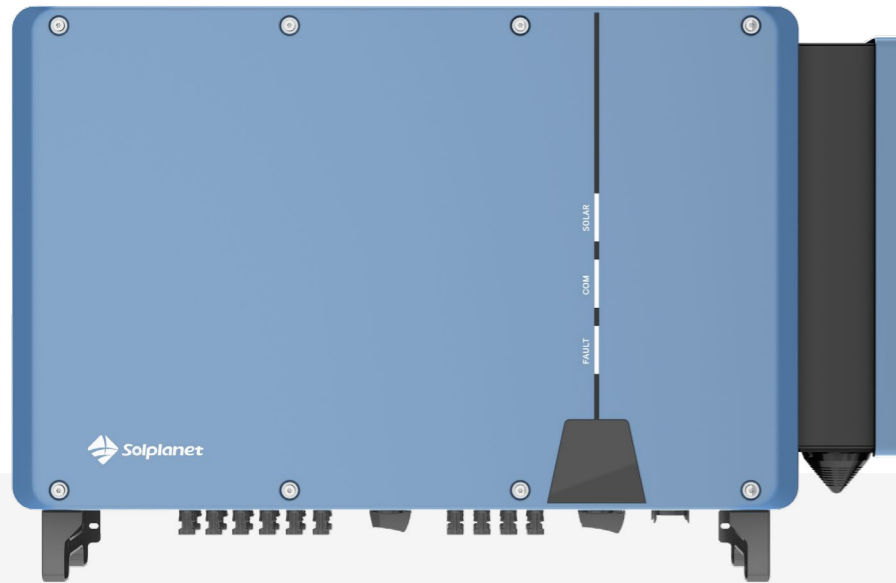

Models:
ASW75K-LT
ASW80K-LT
ASW100K-LT
ASW110K-LT



Safe and Reliable

- TYPE II Surge Protection for DC&AC
- IP66 rated design for outdoor use
- Fuse free design



Higher Yields

- ShadeSol shadow management
- 32A input current each MPPT, ideal for bifacial and large area PV modules
- 10 MPPTs for flexible PV array design for higher yields



User-friendly

- Support 7*24H monitoring
- Quick setup and commissioning with Solplanet Apps
- String-level Management

Technical Datasheet


	ASW 75K-LT	ASW 80K-LT	ASW 100K-LT	ASW 110K-LT	
Input (DC)	Max. PV array power	112500 Wp STC	120000 Wp STC	150000 Wp STC	
	Max. input voltage	1100 V			
	MPP voltage range / rated input voltage	200V - 1000 V / 630 V			
	Min. input voltage	200 V			
	Initial. feed-in voltage	250 V			
	Max. operating input current	32 A			
	Max. short circuit current	48 A			
	No. of independent MPPT inputs / strings per MPPT input	8/2	8/2	10/2	10/2
Output (AC)	Rated active power	75000 W	80000 W	100000 W	110000 W
	Rated appearant power	75000 VA	80000 VA	100000 VA	110000 VA
	Max. apparent power	75000 W	88000 W	110000 W	121000 W
	AC nominal voltage	220 V / 380 V 230 V / 400 V			
	AC voltage range	312 V - 528 V			
	AC grid frequency / range	50 Hz / 45 Hz - 55 Hz 60 Hz / 55 Hz - 65 Hz			
	AC nominal output current	114.0 A	115.8 A	144.3 A	158.8 A
	Max. output current	114.0 A	127.0 A	158.8 A	174.7 A
	Adjustable power factor range	0.8 leading to 0.8 lagging			
	Feed-in phases	3 / 3-N-PE			
Efficiency & Protection	Harmonic distortion (THD) at rated output	< 3%			
	Max. efficiency / European efficiency	98.6% / 98.4%			
	DC switch	●			
	Ground fault monitoring / grid monitoring	● / ●			
	DC reverse polarity protection / AC short circuit protection	●			
	AC Overcurrent Protection	●			
	DC Surge Protection	Type II			
	AC Surge Protection	Type II			
	Residual Current Monitoring Unit	●			
	Arc fault circuit interrupter (AFCI)	○			
General data	Anti-islanding Protection	●			
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II			
	Dimensions (W / H / D)	984/ 640 / 330 mm			
	Weight	86 kg			
	Operating temperature range	-25°C ... +60°C			
	Self-consumption (at night)	< 3 W			
	Topology	Non-isolated			
	Cooling concept	Active cooling			
	Degree of protection (according to IEC 60529)	IP66			
	Climatic category (according to IEC 60721-3-4)	4K4H			
Features	Max. permissible value for relative humidity (non-condensing)	100%			
	Max. operating altitude	4000 m			
	EMC	CLASS B			
	DC Connector	DC Plug-in connector			
	AC Connector	OT/DT Terminal (Max.240mm2)			
	LED indicators (Status / Fault / Communication)	●			
	24/7 moitoring	●			
	Communication interface	●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)			
	Modbus-Sunspec protocol	●			
	Certificates and approvals (more available on request)	CE, IEC 62109-1/2, IEC 61727, IEC 62116, IEC61683, EN50549-1/2, VDE4105			

● standard features ○ optional

Data at nominal conditions. All information is subject to change.


Hybrid Inverters

Perfect for home
& small commercial and
industrial applications



ASW H-S2 SERIES

ASW3000 / 3680 / 4000 /
5000 / 6000H-S2




ASW H-T2 SERIES

ASW05k / 06k / 08k / 10k / 12kH-T2
ASW05k / 06k / 08k / 10k / 12kH-T2-O

ASW H-T3 SERIES

ASW08k / 10k / 12kH-T3
ASW08k / 10k / 12kH-T3-O




ASW H-T2-DG SERIES

ASW05k / 06k / 08k / 10k / 12kH-T2-DG

ASW H-T3-DG SERIES

ASW08k / 10k / 12kH-T3-DG



ASW A-S SERIES

ASW0600/1250A-S	ASW0600/2500A-S
ASW0800/1250A-S	ASW0800/2500A-S
ASW1000/1250A-S	ASW1000/2500A-S

Single phase hybrid inverters 3 to 6 kW

ASW H-S2 Series



Models:
ASW3000H-S2
ASW3680H-S2
ASW4000H-S2
ASW5000H-S2
ASW6000H-S2



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- Smart energy management
- UPS capability - power during blackouts
- IP66 rated design for outdoor use



User-friendly

- User friendly app interface
- Online monitoring via Wi-Fi and Solplanet apps
- ShadeSol shadow management

Technical Datasheet

	ASW3000H-S2	ASW3680H-S2	ASW4000H-S2	ASW5000H-S2	ASW6000H-S2	
PV Input	Max. PV array power	5500 Wp STC	6180 Wp STC	6500 Wp STC	9000 Wp STC	
	Max. input voltage	550 V				
	MPP voltage range / rated input voltage	40 V to 530 V / 380 V				
	Min. input voltage / start voltage	40 V / 50 V				
	No. of independent MPPT trackers / strings per MPPT input	2 / 1				
	Max. input current per MPP tracker	16 A				
	Max. short-circuit current per MPP tracker	20 A				
Battery input	Nominal battery voltage	48 V				
	Battery voltage range	40 V to 60 V				
	Max. charging / discharging power	5000 W / 5000 W				
	Max. charging current / Max. discharging current	100 A / 100A				
	Battery type	LiFePO4				
Compatible Battery	Aiswei Ai-LB series ³					
AC output	AC voltage range / Nominal AC voltage	180 V to 280 V / 230 V				
	Rated AC grid frequency	50 Hz / 60 Hz				
	AC grid frequency range	50 Hz±5Hz / 60 Hz±5Hz				
	Rated active power	3000 W	3680 W	4000 W	5000 W ^{*1}	6000 W
	Rated apparent power	3000 VA	3680 VA	4000 VA	5000 VA ^{*1}	6000 VA
	Max. apparent power	3000 VA	3680 VA	4000 VA	5000 VA ^{*1}	6000 VA
	Rated grid output Current (@230V)	13.1 A	16 A	17.4 A	21.7 A ^{*2}	26.1 A
	Max. grid output current	13.6 A	16 A	18.2 A	22.7 A ^{*2}	27.3 A
	Harmonics THDi (@ Nominal power)	< 3%				
	AC input	Rated grid voltage	a.c. 230V			
Rated apparent power		6000 VA				
Max. input apparent power from grid		6000 VA				
Rated input current from grid		a.c. 26.1 A				
Max. input current from grid		a.c. 27.3 A				
EPS output	Nominal output voltage	230 V				
	Nominal output frequency	50 Hz / 60 Hz				
	Rated apparent power	5000 VA				
	Max. output apparent power	5000 VA				
	Peak output apparent power	7500 VA, 10s				
	Rated Current (@230V)	21.7A				
	Max. output current	21.7A				
	Max. switch time	≤ 10 ms				
Efficiency	Output THDi (@ Linear load)	<3%				
	MPPT efficiency	99.90%				
	Euro efficiency / Max. efficiency	97% / 97.6%				
Safety protection	Max. battery to load efficiency	94.70%				
	DC-side disconnection device	●				
	PV string- / Battery input reverse polarity protection	● / ●				
	All-pole sensitive residual current monitoring unit	●				
	Anti-islanding protection	●				
	Ground fault protection	●				
	AC output over current / short circuit current protection	● / ●				
	AC over voltage protection	●				
General data	Protection class (as per IEC 62109-1) / overvoltage category (as per IEC 62109-1)	I / AC: III; DC: II				
	Power factor at rated power / adjustable displacement	≥0.99 / 0.8 leading to 0.8 lagging				
	Dimensions (W / H / D)	483 / 455 / 193.5 mm				
	Device weight	25.1kg				
	Operating temperature range	-25 °C ... +60 °C				
	Noise emissions (typical)	30 dB(A)				
	Standby consumption	< 10 W				
	Cooling concept	Natural convection				
	Degree of protection (as per IEC 60529)	IP66				
	Climatic category (according to IEC 60721-3-4)	4K4H				
	Max. permissible value for relative humidity (non-condensing)	100%				
	Max. operating altitude	4000m (>3000m power derating)				
	Country of manufacture	THE PEOPLE'S REPUBLIC OF CHINA				
Features	User interface	LED & App				
	Communication with BMS	CAN				
	Communication with meter	RS485				
	Communication with portal	WIFI stick / LAN				
	Other communication	DRM				
	Integrated power control / Zero export control	● / ●				

● Standard features / ○ optional features / – not available

^{*1} For VDE-AR-N4105, S_{max}=S_n=4600VA, P_n=4600W

^{*2} For AS/NZS4777.2, I_{ac} max=21.7A

^{*3} Including but not limited to the listed models, please check the website@solplanet for more compatible models

Three phase hybrid inverters 5 to 12 kW

ASW H-T2 Series



Models (w/ EPS): ASW05kH-T2
ASW06kH-T2
ASW08kH-T2
ASW10kH-T2
ASW12kH-T2

Models (w/o EPS): ASW05kH-T2-O
ASW06kH-T2-O
ASW08kH-T2-O
ASW10kH-T2-O
ASW12kH-T2-O



Easy-to-install

- Quick & easy-to-install with basic tools
- Compact wall mount design
- Simple battery and smart meter interfaces for quick and secure installation



Reliable

- Up to 150 % PV array oversizing for higher yields
- Available with or without asymmetrical power output¹⁾
- UPS level switching time < 10 ms
- IP66 rated design for outdoor use



User-friendly

- Setup, commissioning and monitoring via the Solplanet app
- Intelligent work modes and customisable battery management for DOD /Time of Use/Power setting
- Max. 20 A input current, ideal for bifacial and large PV modules

Technical Datasheet

	ASW05kH-T2	ASW06kH-T2	ASW08kH-T2	ASW10kH-T2	ASW12kH-T2		
PV input	Max. PV array power	7500 Wp	9000 Wp	12000 Wp	18000 Wp		
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	150 V to 950 V / 630 V			200 V to 950 V / 630 V ²⁾		
	Min. input voltage / start voltage	60 V / 180 V					
	No. of independent MPPT trackers / strings per MPPT input	2 / 1					
	Max. input current / Max. power per MPP tracker	20 A	7500 W	20 A	10000 W	20 A	
	Max. short-circuit current per MPP tracker	30 A					
Battery input	Battery voltage range	120 V to 600 V					
	Max. charging / discharging power	5000 W	6000 W	8000 W	10000 W	12000 W	
	Max. charging current / Max. discharging current	30A					
	Battery type	LiFePO4					
AC input	Rated grid voltage	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Rated grid frequency	50 Hz / 60 Hz					
	Max. input power from grid	10000 W	12000 W	16000 W	20000 W	24000 W	
	Max. input current from grid	14.5 A	17.4 A	23.2 A	29.0 A	34.8 A	
	AC voltage range / Nominal AC voltage	270 V to 480 V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
AC output	Rated AC grid frequency	50 Hz / 60 Hz					
	AC grid frequency range	45 ~ 55 Hz / 55 ~ 65 Hz					
	Rated apparent power	5000 VA	6000 VA	8000 VA	10000 VA	12000 VA	
	Max. apparent power	5000 VA	6000 VA	8000 VA	10000 VA	12000 VA	
	Rated grid output current (@400 V)	7.3 A	8.7 A	11.6 A	14.5 A	17.4 A	
	Max. grid output current (@400 V)	8.0 A	9.6 A	12.8 A	16.0 A	19.2 A	
	Harmonics THDi (@Nominal power)	< 3 % (of nominal power)					
	Nominal output voltage	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
EPS output	Nominal output frequency	50 Hz / 60 Hz					
	Rated apparent power	5000 VA	6000 VA	8000 VA	10000 VA	12000 VA	
	Rated current (@400 V)	7.3 A	8.7 A	11.6 A	14.5 A	17.4 A	
	Max. current (@400 V, continuous on-grid / off-grid)	14.5 A	7.3 A	17.4 A	8.7 A	23.2 A	
	Max. power on each phase(@400 V, continuous on-grid / off-grid)	3333 W	1667 W	4000 W	2000 W	5333 W	
	Peak output apparent power(@400 V, continuous on-grid / off-grid up to 10s)	10000 VA	10000 VA	12000 VA	12000 VA	16000 VA	
	Max. switch time	< 10 ms					
	Output THDv (@Linear load)	2 %					
	Efficiency	MPPT efficiency	99.9 %				
		Euro efficiency / Max. efficiency	97.2 % / 98.0 %	97.5 % / 98.2 %	97.9 % / 98.4 %		
Safety protection	DC surge protection (Type II, according to EN/IEC 61643-11)	●					
	Insulation resistance detection	●					
	PV string input reverse polarity protection	●					
	Battery input reverse polarity protection	●					
	Ground fault monitoring	●					
	Residual current monitoring unit	●					
	AC short circuit protection	●					
	Anti-islanding protection	●					
General data	Power factor at rated power / adjustable displacement	1 / 0.8 leading to 0.8 lagging					
	Dimensions (W / H / D)	545 mm / 465 mm / 205 mm					
	Weight	24.5 kg					
	Operating temperature range	-25 °C ... +60 °C					
	Cooling concept	Natural convection					
	Noise emission	< 35 dB					
	Degree of protection (as per IEC 60529)	IP66					
	Max. relative humidity	100 %					
Features	Max. operating altitude	4000 m					
	User interface	LED & App					
	BMS interface	CAN					
	Smart meter interface	RS485					
	Internet communication interfaces	Wifi / LAN					
	Digital output (dry contact) / No. of outputs	● / 2					
	Digital input (dry contact) / No. of inputs	● / 4					
Integrated power control / export power control	● / ●						

● standard features ○ optional features - not available

1) Asymmetrical power output functionality released in August 2024, please confirm version with Solplanet's sales staff before purchase.

2) The latest optimised platform design supports MPP voltage range at 150V-950V, pending subsequent certificate updates.

Technical Datasheet

	ASW05kH-T2-O	ASW06kH-T2-O	ASW08kH-T2-O	ASW10kH-T2-O	ASW12kH-T2-O							
PV input	Max. PV array power		7500 Wp	9000 Wp	12000 Wp	15000 Wp	18000 Wp					
	Max. input voltage		1100 V									
	MPP voltage range / rated input voltage		150 V to 950 V / 630 V		200 V to 950 V / 630 V ²⁾							
	Min. input voltage / start voltage		60 V / 180 V									
	No. of independent MPPT trackers / strings per MPPT input		2 / 1									
	Max. input current / Max. power per MPPT tracker		20 A	7500 W	20 A	9000 W	20 A	10000 W	20 A	10000 W	20 A	10000 W
	Max. short-circuit current per MPPT tracker		30 A									
Battery input	Battery voltage range		120 V to 600 V									
	Max. charging / discharging power		5000 W	6000 W	8000 W	10000 W	12000 W					
	Max. charging current / Max. discharging current		30 A									
	Battery type		LiFePO4									
AC input	Rated grid voltage		3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V									
	Rated grid frequency		50 Hz / 60 Hz									
	Max. input power from grid		5000 W	6000 W	8000 W	10000 W	12000 W					
	Max. input current from grid		7.3 A	8.7 A	11.6 A	14.5 A	17.4 A					
AC output	AC voltage range / Nominal AC voltage		270 V to 480 V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V									
	Rated AC grid frequency		50 Hz / 60 Hz									
	AC grid frequency range		45-55 Hz / 55-65 Hz									
	Rated apparent power		5000 VA	6000 VA	8000 VA	10000 VA	12000 VA					
	Max. apparent power		5000 VA	6000 VA	8000 VA	10000 VA	12000 VA					
	Rated grid output Current current (@400 V)		7.3 A	8.7 A	11.6 A	14.5 A	17.4 A					
	Max. grid output current(@400 V)		8.0 A	9.6 A	12.8 A	16.0 A	19.2 A					
	Harmonics THDi (@ Nominal power)		< 3 % (of nominal power)									
	Efficiency	MPPT efficiency		99.9 %								
Euro efficiency / Max. efficiency		97.2 % / 98.0 %	97.5 % / 98.2 %	97.9 % / 98.4 %								
Safety protection	DC surge protection(Type II, according to EN/IEC 61643-11)		●									
	Insulation resistance detection		●									
	PV string input reverse polarity protection		●									
	Battery input reverse polarity protection		●									
	Ground fault monitoring		●									
	Residual current monitoring unit		●									
	AC short circuit protection		●									
	Anti-islanding protection		●									
General data	Power factor at rated power / adjustable displacement		1 / 0.8 leading to 0.8 lagging									
	Dimensions (W / H / D)		545 mm / 465 mm / 205 mm									
	Weight		24.5 kg									
	Operating temperature range		-25 °C ... +60 °C									
	Cooling concept		Natural convection									
	Noise emission		< 35 dB									
	Degree of protection (as per IEC 60529)		IP66									
	Max. relative humidity		100%									
Max. operating altitude		4000 m										
Features	User interface		LED & App									
	BMS interface		CAN									
	Smart meter interface		RS485									
	Internet communication interfaces		Wifi / LAN									
	Digital output (dry contact) / No. of outputs		● / 2									
	Digital input (dry contact) / No. of inputs		● / 4									
Integrated power control / export power control		● / ●										

● standard features ○ optional features - not available

1) Asymmetrical power output functionality released in August 2024, please confirm version with Solplanet's sales staff before purchase.

2) The latest optimised platform design supports MPP voltage range at 150V-950V, pending subsequent certificate updates.

Three phase hybrid inverters 8 to 12 kW

ASW H-T3 Series



Models (w/ EPS):
ASW08kH-T3
ASW10kH-T3
ASW12kH-T3

Models (w/o EPS):
ASW08kH-T3-O
ASW10kH-T3-O
ASW12kH-T3-O



Easy-to-install

- Quick & easy-to-install with basic tools
- Compact wall mount design
- Simple battery and smart meter interfaces for quick and secure installation



Reliable

- Up to 150 % PV array oversizing for higher yields
- Available with or without asymmetrical power output¹⁾
- UPS level switching time < 10 ms
- IP66 rated design for outdoor use



User-friendly

- 3 independent MPPTs for flexible and higher kWp PV array design
- Setup, commissioning and monitoring via the Solplanet app
- Intelligent work modes and customisable battery management for DOD / Time of Use / Power setting
- Max. 16 A input current, ideal for bifacial and large PV modules

Technical Datasheet

	ASW08kH-T3	ASW10kH-T3	ASW12kH-T3				
PV input	Max. PV array power	12000 Wp	15000 Wp	18000 Wp			
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	200 V to 950 V / 630 V ²⁾					
	Min. input voltage / start voltage	60 V / 180 V					
	No. of independent MPPT trackers / strings per MPPT input	3 / 1					
	Max. input current / Max. power per MPP tracker	16 A	10000 W	16 A	10000 W	16 A	10000 W
Max. short-circuit current per MPP tracker	24 A						
Battery input	Battery voltage range	120 V to 600 V					
	Max. charging / discharging power	8000 W	10000 W	12000 W			
	Max. charging current / Max. discharging current	30 A					
	Battery type	LiFePO4					
AC input	Rated grid voltage	3/N/PE, 220 / 380 V; 230 / 400 V; 240 / 415 V					
	Rated grid frequency	50 Hz / 60 Hz					
	Max. input power from grid	16000 W	20000 W	24000 W			
	Max. input current from grid	23.2 A	29.0 A	34.8 A			
AC output	AC voltage range / Nominal AC voltage	270V to 480V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Rated AC grid frequency	50 Hz / 60 Hz					
	AC grid frequency range	45 ~ 55 Hz / 55 ~ 65 Hz					
	Rated apparent power	8000 VA	10000 VA	12000 VA			
	Max. apparent power	8000 VA	10000 VA	12000 VA			
	Rated grid output current (@400 V)	11.6 A	14.5 A	17.4 A			
	Max. grid output current(@400 V)	12.8 A	16.0 A	19.2 A			
	Harmonics THDi (@ Nominal power)	< 3 % (of nominal power)					
EPS output	Nominal output voltage	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Nominal output frequency	50 Hz / 60 Hz					
	Rated apparent power	8000 VA	10000 VA	12000 VA			
	Rated current (@400 V)	11.6 A	14.5 A	17.4 A			
	Max. current (@400 V, continuous on-grid / off-grid)	23.2 A	11.6 A	29.0 A	14.5 A	34.8 A	17.4 A
	Max. power on each phase(@400 V, continuous on-grid / off-grid)	5333 W	2667 W	6667 W	3333 W	8000 W	4000 W
	Peak output apparent power(@400 V, continuous on-grid / off-grid up to 10s)	16000 VA	16000 VA	20000 VA	20000 VA	24000 VA	24000 VA
	Max. switch time	< 10 ms					
Output THDv (@ Linear load)	2 %						
Effi- ciency	MPPT efficiency	99.9 %					
	Euro efficiency / Max. efficiency	97.2 % / 98.0 %	97.9 % / 98.4 %				
Safety protection	DC surge protection(Type II, according to EN/IEC 61643-11)	●					
	Insulation resistance detection	●					
	PV string input reverse polarity protection	●					
	Battery input reverse polarity protection	●					
	Ground fault monitoring	●					
	Residual current monitoring unit	●					
	AC short circuit protection	●					
Anti-islanding protection	●						
General data	Power factor at rated power / adjustable displacement	1 / 0.8 leading to 0.8 lagging					
	Dimensions (W / H / D)	545 mm / 465 mm / 205 mm					
	Weight	26 kg					
	Operating temperature range	-25 °C ... +60 °C					
	Cooling concept	Natural convection					
	Noise emission	< 35 dB					
	Degree of protection (as per IEC 60529)	IP66					
	Max. relative humidity	100 %					
Max. operating altitude	4000 m						
Features	User interface	LED & App					
	BMS interface	CAN					
	Smart meter interface	RS485					
	Internet communication interfaces	Wifi / LAN					
	Digital output (dry contact) / No. of outputs	● / 2					
	Digital input (dry contact) / No. of inputs	● / 4					
Integrated power control / export power control	● / ●						

● standard features ○ optional features - not available

1) Asymmetrical power output functionality released in August 2024, please confirm version with Solplanet's sales staff before purchase.

2) The latest optimised platform design supports MPP voltage range at 150V-950V, pending subsequent certificate updates.

Technical Datasheet

	ASW08kH-T3-O	ASW10kH-T3-O	ASW12kH-T3-O			
PV input	Max. PV array power	12000 Wp	15000 Wp	18000 Wp		
	Max. input voltage	1100 V				
	MPP voltage range / rated input voltage	200 V to 950 V / 630 V ²⁾				
	Min. input voltage / start voltage	60 V / 180 V				
	No. of independent MPPT trackers / strings per MPPT input	3 / 1				
	Max. input current / Max. power per MPP tracker	16 A	10000 W	16 A	10000 W	16 A
Max. short-circuit current per MPP tracker	24 A					
Battery input	Battery voltage range	120 V to 600 V				
	Max. charging / discharging power	8000 W	10000 W	12000 W		
	Max. charging current / Max. discharging current	30 A				
	Battery type	LiFePO4				
AC input	Rated grid voltage	3/N/PE, 220 / 380 V; 230 / 400 V; 240 / 415 V				
	Rated grid frequency	50 Hz / 60 Hz				
	Max. input power from grid	8000 W	10000 W	12000 W		
	Max. input current from grid	11.6 A	14.5 A	17.4 A		
AC output	AC voltage range / nominal AC voltage	270V to 480V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V				
	Rated AC grid frequency	50 Hz / 60 Hz				
	AC grid frequency range	45 ~ 55 Hz / 55 ~ 65 Hz				
	Rated apparent power	8000 VA	10000 VA	12000 VA		
	Max. apparent power	8000 VA	10000 VA	12000 VA		
	Rated grid output current (@400 V)	11.6 A	14.5 A	17.4 A		
	Max. grid output current (@400 V)	12.8 A	16.0 A	19.2 A		
	Harmonics THDi (@Nominal power)	< 3 % (of nominal power)				
Effi- ciency	MPPT efficiency	99.9 %				
	Euro efficiency / Max. efficiency	97.2 % / 98.0 %	97.9 % / 98.4 %			
Safety protection	DC surge protection(Type II, according to EN/IEC 61643-11)	●				
	Insulation resistance detection	●				
	PV string input reverse polarity protection	●				
	Battery input reverse polarity protection	●				
	Ground fault monitoring	●				
	Residual current monitoring unit	●				
	AC short circuit protection	●				
Anti-islanding protection	●					
General data	Power factor at rated power / adjustable displacement	1 / 0.8 leading to 0.8 lagging				
	Dimensions (W / H / D)	545 mm / 465 mm / 205 mm				
	Weight	26 kg				
	Operating temperature range	-25 °C ... +60 °C				
	Cooling concept	Natural convection				
	Noise emission	< 35 dB				
	Degree of protection (as per IEC 60529)	IP66				
	Max. relative humidity	100 %				
Max. operating altitude	4000 m					
Features	User interface	LED & App				
	BMS interface	CAN				
	Smart meter interface	RS485				
	Internet communication interfaces	Wifi / LAN				
	Digital output (dry contact) / No. of outputs	● / 2				
	Digital input (dry contact) / No. of inputs	● / 4				
Integrated power control / export power control	● / ●					

● standard features ○ optional features - not available

1) Asymmetrical power output functionality released in August 2024, please confirm version with Solplanet's sales staff before purchase.

2) The latest optimised platform design supports MPP voltage range at 150V-950V, pending subsequent certificate updates.

Three phase hybrid inverters 5 to 12 kW

ASW H-T2-DG Series



Models:

- ASW05kH-T2-DG
- ASW06kH-T2-DG
- ASW08kH-T2-DG
- ASW10kH-T2-DG
- ASW12kH-T2-DG



Easy-to-install

- Quick & easy-to-install with basic tools
- Compact wall mount design
- Simple battery and smart meter interfaces for quick and secure installation



Reliable

- Up to 150 % PV array oversizing for higher yields
- Asymmetrical power output
- UPS level switching time < 10 ms
- IP66 rated design for outdoor use
- DC SPD surge protection



User-friendly

- Max. 50A charging/discharging current
- Compatible with diesel generator
- Setup, commissioning and monitoring via the Solplanet app
- Intelligent work modes and customisable battery management for DOD /Time of Use/Power setting
- Max. 20 A input current, ideal for bifacial and large PV modules

Technical Datasheet

	ASW05kH-T2-DG	ASW06kH-T2-DG	ASW08kH-T2-DG	ASW10kH-T2-DG	ASW12kH-T2-DG
PV input	Max. PV array power				
	7500 Wp				
	9000 Wp				
	12000 Wp				
	15000 Wp				
	18000 Wp				
	Max. input voltage				
1100 V					
MPP voltage range / rated input voltage					
150 V to 950 V / 630 V					
Min. input voltage / start voltage					
60 V / 180 V					
No. of independent MPPT trackers / strings per MPPT input					
2 / 1					
Max. input current / Max. power per MPPT tracker					
20 A / 7500 W					
20 A / 9000 W					
20 A / 10000 W					
20 A / 10000 W					
20 A / 10000 W					
Max. short-circuit current per MPPT tracker					
30 A					
Battery input	Battery voltage range				
	120 V to 600 V				
	Max. charging power from PV and grid				
	12000 W				
	Max. charging power from grid				
	5000 W				
6000 W					
8000 W					
10000 W					
12000 W					
Max. discharging power					
5000 W					
6000 W					
8000 W					
10000 W					
12000 W					
Max. charging current / Max. discharging current					
50 A					
Battery type					
LiFePO4					
AC input	Rated grid voltage				
	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V				
	Rated grid frequency				
	50 Hz / 60 Hz				
	Max. input power from grid				
10000 W					
12000 W					
16000 W					
20000 W					
24000 W					
Max. input current from grid					
14.5 A					
17.4 A					
23.2 A					
29.0 A					
34.8 A					
AC output	AC voltage range / Nominal AC voltage				
	270 V to 480 V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V				
	Rated AC grid frequency				
	50 Hz / 60 Hz				
	AC grid frequency range				
	45 ~ 55 Hz / 55 ~ 65 Hz				
	Rated apparent power				
	5000 VA				
	6000 VA				
	8000 VA				
10000 VA					
12000 VA					
Max. apparent power					
5000 VA					
6000 VA					
8000 VA					
10000 VA					
12000 VA					
Rated grid output current (@400 V)					
7.3 A					
8.7 A					
11.6 A					
14.5 A					
17.4 A					
Max. grid output current (@400 V)					
8.0 A					
9.6 A					
12.8 A					
16.0 A					
19.2 A					
Harmonics THDi (@ Nominal power)					
< 3 % (of nominal power)					
EPS output	Nominal output voltage				
	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V				
	Nominal output frequency				
	50 Hz / 60 Hz				
	Rated apparent power				
	5000 VA				
	6000 VA				
	8000 VA				
	10000 VA				
	12000 VA				
	Rated current (@400 V)				
	7.3 A				
	8.7 A				
11.6 A					
14.5 A					
17.4 A					
Max. current (@400 V, continuous on-grid / off-grid)					
14.5 A					
7.3 A					
17.4 A					
8.7 A					
23.2 A					
11.6 A					
29.0 A					
14.5 A					
34.8 A					
17.4 A					
Max. power on each phase (@400 V, continuous on-grid / off-grid)					
3333 W					
1667 W					
4000 W					
2000 W					
5333 W					
2667 W					
6667 W					
3333 W					
8000 W					
4000 W					
Peak output apparent power (@400 V, continuous on-grid / off-grid up to 10s)					
10000 VA					
10000 VA					
12000 VA					
12000 VA					
16000 VA					
16000 VA					
20000 VA					
20000 VA					
24000 VA					
24000 VA					
Max. switch time					
< 10 ms					
Output THDv (@ Linear load)					
2 %					
Generator side	Max. input apparent power				
	7500 VA				
	9000 VA				
	12000 VA				
	15000 VA				
18000 VA					
Max. charging power of battery					
5000 W					
6000 W					
8000 W					
10000 W					
12000 W					
Rated AC voltage					
3/N/PE, 220 / 380 V; 230 / 400 V; 240 / 415 V					
Rated AC frequency					
50 Hz / 60 Hz					
Efficiency	MPPT efficiency				
	99.9 %				
	Euro efficiency / Max. efficiency				
97.2 % / 98.0 %					
97.5 % / 98.2 %					
97.9 % / 98.4 %					
Safety protection	DC surge protection(Type II, according to EN/IEC 61643-11)				
	●				
	Insulation resistance detection				
	●				
	PV string input reverse polarity protection				
	●				
	Battery input reverse polarity protection				
	●				
Ground fault monitoring					
●					
Residual current monitoring unit					
●					
AC short circuit protection					
●					
Anti-islanding protection					
●					
General data	Power factor at rated power / adjustable displacement				
	1 / 0.8 leading to 0.8 lagging				
	Dimensions (W / H / D)				
	625 mm / 465 mm / 241 mm				
	Weight				
	28 kg				
	Operating temperature range				
-25 °C ... +60 °C					
Cooling concept					
Natural convection					
Degree of protection (as per IEC 60529)					
IP66					
Max. relative humidity					
100 %					
Max. operating altitude					
4000 m					
Features	User interface				
	LED & App				
	BMS interface				
	CAN				
	Smart meter interface				
	RS485				
	Internet communication interfaces				
Wifi / LAN / Ethernet					
Digital output (dry contact) / No. of outputs					
● / 2					
Digital input (dry contact) / No. of inputs					
● / 4					
Integrated power control / export power control					
● / ●					

● standard features ○ optional features - not available

Three phase hybrid inverters 8 to 12 kW

ASW H-T3-DG Series



Models:
ASW08kH-T3-DG
ASW10kH-T3-DG
ASW12kH-T3-DG



Easy-to-install

- Quick & easy-to-install with basic tools
- Compact wall mount design
- Simple battery and smart meter interfaces for quick and secure installation



Reliable

- Up to 150 % PV array oversizing for higher yields
- Asymmetrical power output
- UPS level switching time < 10 ms
- IP66 rated design for outdoor use
- DC SPD surge protection



User-friendly

- 3 independent MPPTs for flexible and higher kWp PV array design
- Max. 50A charging/discharging current
- Compatible with diesel generator
- Setup, commissioning and monitoring via the Solplanet app
- Intelligent work modes and customisable battery management for DOD /Time of Use/Power setting
- Max. 16 A input current, ideal for bifacial and large PV modules

Technical Datasheet

	ASW08kH-T3-DG	ASW10kH-T3-DG	ASW12kH-T3-DG				
PV input	Max. PV array power	12000 Wp	15000 Wp	18000 Wp			
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	150 V to 950 V / 630 V					
	Min. input voltage / start voltage	60 V / 180 V					
	No. of independent MPPT trackers / strings per MPPT input	3 / 1					
	Max. input current / Max. power per MPP tracker	16 A	10000 W	16 A	10000 W	16 A	10000 W
Max. short-circuit current per MPP tracker	24 A						
Battery input	Battery voltage range	120 V to 600 V					
	Max. charging power from PV and grid	12000 W					
	Max. charging power from grid	8000 W	10000 W		12000 W		
	Max. discharging power	8000 W	10000 W		12000 W		
	Max. charging current / Max. discharging current	50 A					
Battery type	LiFePO4						
AC input	Rated grid voltage	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Rated grid frequency	50 Hz / 60 Hz					
	Max. input power from grid	16000 W	20000 W		24000 W		
	Max. input current from grid	23.2 A	29.0 A		34.8 A		
AC output	AC voltage range / Nominal AC voltage	270V to 480V / 3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Rated AC grid frequency	50 Hz / 60 Hz					
	AC grid frequency range	45-55 Hz / 55-65 Hz					
	Rated apparent power	8000 VA	10000 VA		12000 VA		
	Max. apparent power	8000 VA	10000 VA		12000 VA		
	Rated grid output current (@400 V)	11.6 A	14.5 A		17.4 A		
	Max. grid output current(@400 V)	12.8 A	16.0 A		19.2 A		
	Harmonics THDi (@ Nominal power)	< 3 % (of nominal power)					
EPS output	Nominal output voltage	3/N/PE, 220 V / 380 V; 230 V / 400 V; 240 V / 415 V					
	Nominal output frequency	50 Hz / 60 Hz					
	Rated apparent power	8000 VA	10000 VA		12000 VA		
	Rated current (@400 V)	11.6 A	14.5 A		17.4 A		
	Max. current (@400 V, continuous on-grid / off-grid)	23.2 A	11.6 A	29.0 A	14.5 A	34.8 A	17.4 A
	Max. power on each phase(@400 V, continuous on-grid / off-grid)	5333 W	2667 W	6667 W	3333 W	8000 W	4000 W
	Peak output apparent power(@400 V, continuous on-grid / off-grid up to 10s)	16000 VA	16000 VA	20000 VA	20000 VA	24000 VA	24000 VA
	Max. switch time	< 10 ms					
	Output THDv (@ Linear load)	2 %					
	Generator side	Max. input apparent power	12000 VA	15000 VA		18000 VA	
Max. charging power of battery		8000 W	10000 W		12000 W		
Rated AC voltage		3/N/PE, 220 / 380 V; 230 / 400 V; 240 / 415 V					
Rated AC frequency		50 Hz / 60 Hz					
Efficiency	MPPT efficiency	99.9 %					
	Euro efficiency / Max. efficiency	97.2 % / 98.0 %		97.9 % / 98.4 %			
Safety protection	DC surge protection(Type II, according to EN/IEC 61643-11)	●					
	Insulation resistance detection	●					
	PV string input reverse polarity protection	●					
	Battery input reverse polarity protection	●					
	Ground fault monitoring	●					
	Residual current monitoring unit	●					
	AC short circuit protection	●					
Anti-islanding protection	●						
General data	Power factor at rated power / adjustable displacement	1/ 0.8 leading to 0.8 lagging					
	Dimensions (W / H / D)	625 mm / 465 mm / 241 mm					
	Weight	29.5 kg					
	Operating temperature range	-25 °C ... +60 °C					
	Cooling concept	Natural convection					
	Degree of protection (as per IEC 60529)	IP66					
Features	Max. relative humidity	100 %					
	Max. operating altitude	4000 m					
	User interface	LED & App					
	BMS interface	CAN					
	Smart meter interface	RS485					
	Internet communication interfaces	Wifi / LAN / Ethernet					
	Digital output (dry contact) / No. of outputs	● / 2					
Digital input (dry contact) / No. of inputs	● / 4						
Integrated power control / export power control	● / ●						

● standard features ○ optional features - not available

ASW A-S Series



Models:
 ASW0600/1250A-S ASW0600/2500A-S
 ASW0800/1250A-S ASW0800/2500A-S
 ASW1000/1250A-S ASW1000/2500A-S




Safe and Reliable

- Isolated topology, safe and reliable low voltage system
- 10 years warranty
- All-around protection with Battery Management System (BMS)



Easy-to-install

- Quick plug design, easier installation process
- Compact exterior design, fits in your home decorated nicely
- All-in-one system, easy to install for everyone



User-friendly

- Low working temperature down to -15°C
- LCD display screen, intuitive setup and status monitoring
- Setup, commissioning, and monitoring via Solplanet app



Efficient & intelligent

- Over 200% PV array oversizing for higher yields
- 2 MPPTs with 4 strings, increase PV generation.
- 6 work modes, 2 battery capacity choices

Technical Datasheet


	ASW0600/ 1250A-S	ASW0800/ 1250A-S	ASW1000/ 1250A-S	ASW0600/ 2500A-S	ASW0800/ 2500A-S	ASW1000/ 2500A-S	
PV input	Max. PV array power						2000 Wp
	Max. input voltage						50 V
	MPP voltage range / rated input voltage						16 V to 50 V / 40 V
	Min. input voltage / start voltage						26 V / 30 V
	No. of independent MPPT trackers / strings per MPPT input						2 / 2
	Max. input current per MPP tracker						28 A
	Max. short-circuit current per MPP tracker						39 A
Battery input	Rated battery energy			1.3 kWh		2.4 kWh	
	Rated capacity			27 Ah		50 Ah	
	Battery type						LiFePO4
AC output (On-grid)	Nominal AC voltage						220V / 230V / 240V
	AC voltage range						154 V - 276 V
	Rated AC grid frequency						50 Hz / 60 Hz
	AC grid frequency range						45-55 Hz / 55-65 Hz
	Rated apparent power	600 VA	800 VA	1000 VA	600 VA	800 VA	1000 VA
	Max. apparent power	600 VA	800 VA	1000 VA	600 VA	800 VA	1000 VA
	Rated grid output current (@230 V)	2.6 A	3.5 A	4.4 A	2.6 A	3.5 A	4.4 A
	Max. grid output current	2.8 A	3.8 A	4.8 A	2.8 A	3.8 A	4.8 A
	Harmonics THDi (@ Nominal power)						< 3 % (of nominal power)
	AC input	Rated grid voltage					
Rated grid frequency						50 Hz / 60 Hz	
Max. input power from grid						1000 W	
Max. input current from grid						4.8A	
AC output(Off-grid)	Nominal output voltage						230V
	Nominal output frequency						50 Hz / 60 Hz
	Rated apparent power						1000 VA
	Peak output apparent power						1600VA, 60 s
	Rated output current (@230 V)						4.4A
	Max. output current						4.8A
	Output THDv (@ Linear load)						< 2 %
	EPS model						Manual switch
Efficiency	MPPT efficiency						99.9 %
	Max. battery to load efficiency						92.0 %
General data	Power factor at rated power / adjustable range						1 / 0.8 leading to 0.8 lagging
	Topology						Isolated
	Dimensions (W / H / D)						600 / 400 / 310 mm
	Weight			31 kg		38 kg	
	Operating temperature range						-15 °C ... +45 °C
	Cooling concept						Fan Cooling
	Degree of protection (as per IEC 60529)						IP55
	Max. relative humidity						95 %
	Max. operating altitude						3000 m
	Features	User interface					
Zero-export interface						CT	
Internet communication interfaces						Wifi	
Certificates	Grid						VDE 4105 / EN 50549
	Safety						IEC/EN 62109-1, IEC/EN 62109-2
	EMC						IEC/EN 61000-6-1/-2/-3/-4, IEC/EN 61000-3-2/-3
	Battery						IEC62619, UN 38.3

Energy Storage Batteries




Store each energy

HIGH VOLTAGE BATTERY



Ai-HB G2 SERIES


Ai-HB 075A / 100A / 125A /
150A / 175A / 200A



Ai-HB SERIES


Ai-HB 2.56LG

LOW VOLTAGE BATTERY



Ai-LB SERIES


Ai-LB 5K / 10K



Ai-LB Pro SERIES

Ai-LB 5K / 10K Pro

Ai-HB G2 Series

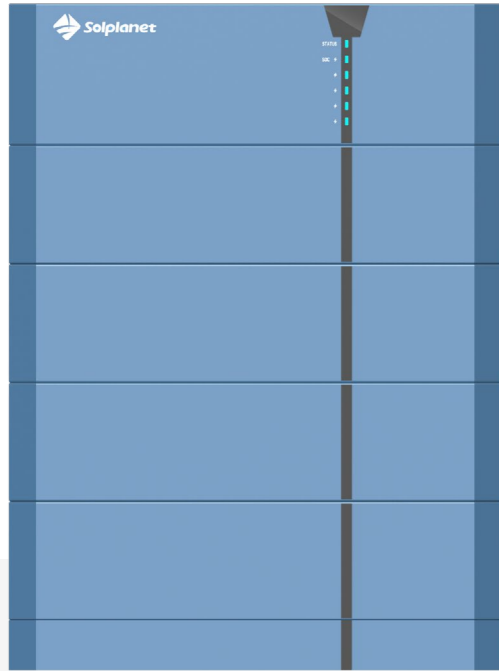

Models:
 Ai-HB 075A Ai-HB 150A
 Ai-HB 100A Ai-HB 175A
 Ai-HB 125A Ai-HB 200A



Safety

- Modular design with plug-in connections
- Quick connections between battery and inverter
- Quick & easy-to-install with basic tools
- Steady and anti-dumping design



Reliable

- IP65 rated design
- Cell-level monitoring
- LFP safe technology
- All-round BMS protection



User-friendly


- Stackable and Expandable up to 81.92 kWh (supporting 8 modules per unit, 4 units in parallel)
- Multi-use applications: self-consumption, time of use tariffs, customisation
- Online monitoring via Solplanet apps

Technical Datasheet

	Ai-HB 075A	Ai-HB 100A	Ai-HB 125A	Ai-HB 150A	Ai-HB 175A	Ai-HB 200A	
Battery designation							
Battery module	HB051050A						
Cell type	LiFePO4						
Module quantity	3	4	5	6	7	8	
Rated capacity	50 Ah						
Nominal energy ¹	7.68 kWh	10.24 kWh	12.8 kWh	15.36 kWh	17.92 kWh	20.48 kWh	
Usable energy ²	6.91 kWh	9.21 kWh	11.52 kWh	13.82 kWh	16.12 kWh	18.43 kWh	
Nominal voltage	153.6 V	204.8 V	256 V	307.2 V	358.4 V	409.6 V	
Operating voltage range	120 V ~ 175.2 V	160 V ~ 233.6 V	200 V ~ 292 V	240 V ~ 350.4 V	280 V ~ 408.8 V	320 V ~ 467.2 V	
Max.charging current	25 A						
Max.discharging current	30 A						
System Data	Rated charging / discharging power	3.84kW	5.12 kW	6.40 kW	7.68 kW	8.86 kW	10.24 kW
	Max.charging power	3.84kW	5.12 kW	6.40 kW	7.68 kW	8.86 kW	10.24 kW
	Max.discharging power	4.61 kW	6.14 kW	7.68 kW	9.22 kW	10.75 kW	12.29 kW
General Data	Dimensions (W / D / H)	540*390*600 mm	540*390*730 mm	540*390*860 mm	540*390*990 mm	540*390*1120 mm	540*390*1250 mm
	Weight	106.5 kg	137 kg	167.5 kg	198 kg	228.5 kg	259 kg
	Battery module weight	30.5 kg					
	Installation location	Indoor / Outdoor					
	Mounting method	Floor mounted					
	Operating temperature range	Charge: 0 ~ 50 °C Discharge: -20 °C ~ 50 °C					
	Storage temperature range	-20 °C ~ 45 °C					
	Cooling concept	Natural convection					
	Degree of protection	IP65					
	Relative humidity	5 ~ 95 %, non - condensing					
	Communication	CAN					
	Certification	IEC 62619 / EN 61000 IEC 62040 / UN38.3					
	Life cycle ³	6000 times					
Protection	Charging over-voltage protection, discharging under-voltage protection, over-current protection, over-temperature protection, short-circuit protection, built-in fire suppression ⁴ , etc						
Round-trip efficiency	≥95%						

1. Nominal energy is defined under the following conditions: cell voltage 2.5~3.65V, 0.5C charge & discharge at +25°C.
 2. Usable energy is defined under the following conditions: 0.5C charge & discharge at +25°C, 90% DOD. Usable energy may vary depending on discharge, charge, environmental conditions and SOC % limits defined by the user.
 3. Life cycle is defined under the following conditions: 0.5C charge & discharge at +25°C, 90% DOD, 70% EOL
 4. Available with or without built-in fire suppression functionality, this feature was released in August 2024, please confirm version with Solplanet sales before purchase.

Ai-HB Series

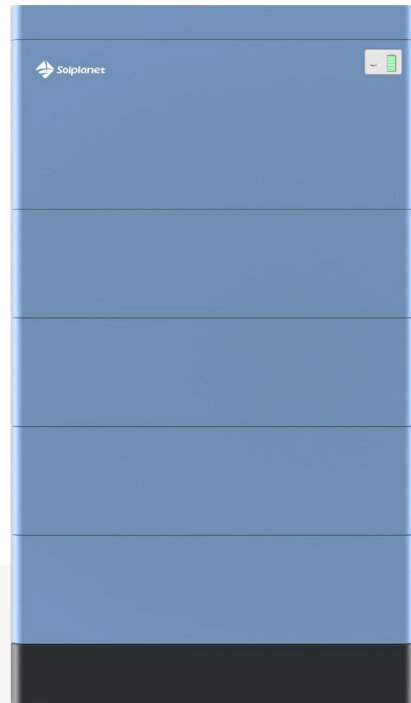

Model:
Ai-HB 2.56LG



Safety

- LFP safe technology
- All-round BMS protection
- Modular design with simple cable connections



Reliable

- IP65 rated design
- High quality cell inside



User-friendly

- Expandable up to 25.6 kWh (10 modules)
- Multi-use applications: self-consumption, time of use tariffs, customisation
- Online monitoring via Solplanet apps

Technical Datasheet

Battery module	Ai-HB 2.56LG									
	3	4	5	6	7	8	9	10		
Battery designation										
Cell type	LiFePO4									
Module quantity	3	4	5	6	7	8	9	10		
Rated capacity	50Ah									
Nominal energy ¹	7.68 kWh	10.24 kWh	12.8 kWh	15.36 kWh	17.92 kWh	20.48 kWh	23.04 kWh	25.6 kWh		
Usable energy ²	6.91 kWh	9.21 kWh	11.52 kWh	13.82 kWh	16.12 kWh	18.43 kWh	20.73 kWh	23.04 kWh		
Nominal voltage	153.6 V	204.8 V	256 V	307.2 V	358.4 V	409.6 V	460.8 V	512 V		
Operating voltage range	134.4 V	179.2 V	224 V	268.8 V	313.6 V	358.4 V	403.2 V	448 V		
	~ 168.4 V	~ 224.64 V	~ 280.8 V	~ 336.96 V	~ 393.12 V	~ 449.28 V	~ 505.44 V	~ 561.6 V		
Nominal charging / discharging current	25 A									
Max. charging / discharging current	50 A									
Rated power	3.84kW	5.12 kW	6.4 kW	7.68 kW	8.86 kW	10.24 kW	11.52kW	12.8 kW		
Max. charging / discharging power	7.68 kW	10.24 kW	12.8 kW	15.36 kW	17.92 kW	20.48 kW	23.04 kW	25.6 kW		
System Data	Dimensions (W/D/H)	600/210/820 mm	600/210/980 mm	600/210/1140 mm	600/210/1300 mm	600/210/1460 mm	600/210/1620 mm	600/210/1780 mm	600/210/1940 mm	
	Weight	102.5 kg	129 kg	155.5 kg	182 kg	208.5 kg	235 kg	261.5 kg	288 kg	
	Battery module weight	26.5 kg								
	Installation location	Indoor / Outdoor								
	Mounting method	Floor mounted								
	Operating temperature range	Charge: 0°C ~ 55 °C Discharge: -20 °C ~ 55 °C								
	Storage temperature range	-20 °C ~ 45 °C								
	Cooling concept	Natural convection								
	Degree of protection	IP65								
	Relative humidity	5%-95 %, non-condensing								
	Communication	RS485 / CAN								
	Certification	IEC 62619 / EN 61000 IEC 62040 / UN38.3								
	Life cycle ³	6000 times								
	Round-trip efficiency	≥95%								

1. Nominal energy is defined under the following conditions: cell voltage 2.0~3.65V, 0.5C charge & discharge at +25°C.

2. Usable energy is defined under the following conditions: 0.5C charge & discharge at +25°C, 90% DOD. Usable energy may vary depending on discharge, charge, environmental conditions and SOC % limits defined by the user.

3. Life cycle is defined under the following conditions: 0.2C charge & discharge at +25°C, 90% DOD, 80% EOL.

Ai-LB Series



Models:
Ai-LB 5K
Ai-LB 10K



Safety

- LFP safe technology
- All-round BMS protection



Reliable

- IP65 rated design for outdoor use
- High quality cell inside



User-friendly

- Supporting Multi-use applications
- Online monitoring via Solplanet apps

Technical Datasheet

	Ai-LB 5K	Ai-LB 10K	
System Data	Cell type	LiFePO4	
	Battery module	LB51100A	
	Module number	1	2
	Rated capacity	100 Ah	200 Ah
	Nominal energy ¹	5.12 kWh	10.24 kWh
	Usable energy ²	4.61 kWh	9.22 kWh
	Nominal battery voltage	51.2 V	
	Battery voltage range	44.8 V - 57.6 V	
	Max. charging / discharging current	50 A	100 A
	Rated charging / discharging power	2.56 kW	5.12 kW
	Max. charging / discharging power	2.56 kW	5.12 kW
	General Data	Dimensions(W/D/H)	490 / 150 / 680 mm
Module weight		44.5 kg	
Weight		57 kg	116 kg
Installation location		indoor / outdoor	
Mounting method		Floor Mounted	Floor Mounted / Wall Mounted
Operating temperature range		Charge: 0°C ~ 55°C Discharge: -20°C ~ 55°C	
Storage temperature range		-20°C ~ 55°C	
Cooling concept		Natural convection	
Degree of protection		IP65	
Relative humidity		5%~95%, non-condensing	
Max. operating altitude		3000m	
Scalability		Max.8 sets in parallel	Max.4 sets in parallel
Communication		CAN	
Certification		TUV/IEC 62619/IEC 62040/IEC 61000/UN38.3	
Life cycle ³		6000 times	
Round-trip efficiency	≥95%		

1. Nominal energy is defined under the following conditions: battery voltage 44.8~57.6V, 0.5C charge & discharge at +25°C.

2. Usable energy is defined under the following conditions: 0.5C charge & discharge at +25°C, 90% DOD.

3. Life cycle is defined under the following conditions: 0.5C charge & discharge at 25°C, 90% DOD, 70% EOL.

Ai-LB Pro Series



Models:
Ai-LB 5K Pro
Ai-LB 10K Pro



Efficient and Intelligent

- Max. discharging rate up to 1C.
- Expandable up to 160 kWh (32 units for Ai-LB 5K Pro and 16 units for Ai-LB 10K Pro in parallel)
- Automatic identification of parallel master and slave machines
- Online monitoring via Solplanet apps



Safe and Reliable

- LFP safe technology
- All-round BMS protection
- High quality cell inside
- IP65 rated design for outdoor use



Widely Applicable

- Charging at low temperature -5°C
- Multi-use applications: self-consumption, time of use tariffs, customisation



User-friendly

- Elegant design with hidden cable connection
- Compact and lightweight design
- Floor/wall mounted, stackable design, easy to install with basic tools

Technical Datasheet

	Ai-LB 5K Pro	Ai-LB 10K Pro	
System Data	Cell type		LiFePO4
	Rated capacity	100 Ah	200 Ah
	Nominal energy ¹	5.12 kWh	10.24 kWh
	Usable energy ²	4.61 kWh	9.22 kWh
	Nominal battery voltage	51.2 V	
	Battery voltage range	44.8 V - 58.4 V	
	Max. charging / discharging current	60A / 100A	120A / 120A
	Rated charging/discharging power	3.07 kW	6.14 kW
	Max. charging / discharging power	3.07 kW / 5.12 kW	6.14 kW / 6.14 kW
	General Data	Dimensions(W/D/H)	
Weight		50 kg	
Installation location		indoor / outdoor	
Mounting method		Floor mounted / Wall mounted	
Operating temperature range		Charging: -5°C ~ 55°C Discharge: -15°C ~ 55°C	
Storage temperature range		-10°C - 50°C	
Cooling concept		Natural convection	
Degree of protection		IP65	
Relative humidity		5% - 95% RH, non-condensing	
Max. operating altitude		3000m	
Scalability		Max.32 sets in parallel	
Communication		CAN / RS485 / Dry Contact / WiFi	
Certification		TUV / IEC 62619 / IEC 62040 / IEC 61000 / UN38.3	
Life cycle ³		6000 times	
Round-trip efficiency		≥ 95%	

1. Nominal energy is defined under the following conditions: battery voltage 44~58.4V, 0.5C charge & discharge at +25°C.

2. Usable energy is defined under the following conditions: 0.5C charge & discharge at +25°C, 90% DOD.

3. Life cycle is defined under the following conditions: 0.5C charge & discharge at 25°C, 90% DOD, 70% EOL.

Smart EV Charger



Driving towards
a green future



SOL APOLLO SERIES

SOL7.4H-WP, SOL7.4H-WS, SOL7.4H-WSS
SOL11H-WP, SOL11H-WS, SOL11H-WSS
SOL22H-WP, SOL22H-WS, SOL22H-WSS

SOL APOLLO Series



Models:
 SOL7.4H-WP, SOL7.4H-WS, SOL7.4H-WSS
 SOL11H-WP, SOL11H-WS, SOL11H-WSS
 SOL22H-WP, SOL22H-WS, SOL22H-WSS



Easy-to-install

- Compact, lightweight and wall mountable
- Easy-to-install with standard tools
- Toolless plug in terminal blocks
- Quick set-up via Bluetooth and APP
- Cable entry on the front or rear of the housing



Reliable

- Elegant design with a dynamic and robust streamlined body
- IP65 enclosure suitable for outdoor use
- IK10 protection rating
- TÜV IEC 61851-1 & CE compliant



Smart & User-Friendly


- Intelligent App for remote control and monitoring
- Scheduled charging and off-peak charging modes
- APP & RFID & NFC for user authentication or easy set up to Plug & Play mode
- Communication capabilities including WiFi, Bluetooth, and Ethernet connectivity
- Solar charging under Solar PV & Eco Mode (optional)

Technical Datasheet

	SOL7.4H-WP	SOL7.4H-WS/WSS	SOL11H-WP	SOL11H-WS/WSS	SOL22H-WP	SOL22H-WS/WSS	
Input & Output	Rated Voltage		230 V AC		400 V AC		
	Rated Frequency						50 Hz / 60 Hz
	Max. Output Power		7.4 kW		11 kW	22 kW	
	Max. Output Current		32 A		16 A	32 A	
	Standby Power Consumption						< 5 W
	Residual Current Detection						DC 6 mA
	Connector Type (IEC62196-2)		Type 2	Type 2 socket ^{1,2}	Type 2	Type 2 socket ^{1,2}	Type 2 / Type 2 socket ^{1,2}
	Cable Length		5 m / 7.5 m	-	5 m / 7.5 m	-	5 m / 7.5 m / -
User Interface & Control	Network Interface						WiFi & Bluetooth & RS485 & LAN
	RFID/NFC Reader						●
	Status Indication						LED Light strip
	Smart APP						●
Working Environment	Ingress Protection						IP65 (Enclosure)
	Operating Temperature						-25°C to 50°C
	Storage Temperature						-40°C to 70°C
	Relative Humidity						5%-95% Non-condensing
	Altitude						Up to 2000 m
	Cooling Concept						Natural Convection
Mechanical	Impact Protection Class						IK10
	UV Resistant						●
	Mounting						Wall / Pedestal
	Dimensions (W/H/D)						230 / 360 / 130 mm
	Weight		5.1 kg	2.6 kg	5.1 kg	2.6 kg	5.1 kg / 2.6 kg
	Colour						● Morandi Blue / ● Black
Safety	DC Leakage Protection						●
	Over Temperature Protection						●
	Ground Protection						●
	Surge Protection (EN60664)						● (Type III)
	Certification						CE, TUV / EN/IEC 61851-1

● Standard features ○ Optional features Not Available
 1) Self-closing cover and built in electronic lock is standard
 2) Shutter for cover is optional
 3) Optional energy meter for solar charging function and dynamic load balancing

Connect & monitor

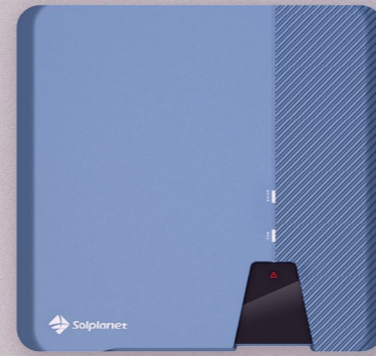

Smart cloud-based
monitoring
& communication
systems



CLOUD BASED MONITORING

Solplanet Cloud and App



COM STICK SERIES

Wi-Fi Stick
Ai-Dongle LAN/WLAN
Ai-Dongle 4G
Ai-Logger 1000



Cloud & App



PV Plant monitoring plays an important role in our approach to revolutionizing access to solar energy. Your energy generation and consumption are presented in simple and easy to read graphs giving you a complete picture of your daily, monthly and yearly usage. Our monitoring solution will help you adjust your consumption behaviours to match your generation allowing you to make the most of your PV plant.

Real time and historical data are readily available via our cloud-based monitoring portal, allowing you to compare your current performance to past results. Solplanet Cloud, our new online monitoring portal, is perfect for home owners, business owners and PV developers who want to monitor their PV Plants from anywhere in the world.

Easy-to-install

- Quick setup and commissioning of Solplanet inverters
- Quick active/reactive and export power control setup
- Available on Android and iOS devices and accessible via web browsers

Reliable

- Cloud-based monitoring system
- Centralized management of all plant data

User-friendly

- Intuitive navigation
- Clear readability of key plant data
- Performance reports sent via email

To download the app search for "Solplanet" or simply scan the QR codes:



Wi-Fi Stick



Ai-Dongle LAN/WLAN



The Ai-Dongle LAN/WLAN/ Wi-Fi Stick allow Solplanet inverters to connect to the Solplanet Cloud and App. The inverter and meter data is collected and sent to the Solplanet Cloud via the internet to allow for easy PV plant monitoring.

Smart

- Smart zero export control design

Simple

- Easy to install on site

Reliable

- Adapt to various application scenarios

Technical Datasheet

		Wi-Fi Stick	ASW-WLAN-G1
Device Management	Max. Number of Manageable Devices	5	10
	Communication Interface	North Communication	LAN / WLAN
South Communication		RS 485 (USB Type A)	
Interac-tion		LED	LED Indicator x 2
Environment	APP	Solplanet APP	
	Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)	
	Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)	
	Relative Humidity (Non-condensing)	5% ~ 95%	
Elec-trical	Max. Operating Altitude	3,000m(9, 842 ft.)	4,000 m (13,123 ft.)
	DC Power Supply	7 ~ 9V	5 ~ 12V
Mechanical	Power Consumption	Typical 2 W, Max. 5 W	
	Dimensions (W x H x D)	51mm*112mm*27mm	50mm*34mm*170mm
	Weight	62g	100g
	Protection Degree	IP65	IP66
Certificate		CE	

Ai-Dongle 4G



The Ai-Dongle 4G allows Solplanet inverters to connect to the Solplanet Cloud and App. The inverter and meter data is collected and sent to the Solplanet Cloud via the internet to allow for easy PV plant monitoring.

Smart

- 4G communication

Simple

- Plug and play design, easy-to-install

Reliable

- IP66

Technical Datasheet

ASW-4G-G1

Device Management	Max. Number of Manageable Devices	5
	Sim card type	Micro SIM (12x15mm)
Communication Interface	Supported standards & frequencies	LTE-FDD:B1/B3/B5/B7/B8/B20/B28 LTE-TDD:B38/B40/B41 GSM:GSM850/EGSM8900/DCS1800/PCS1900
	Wi-Fi Operation Mode	AP
	Supported standards & frequencies	802.11b/g/n (2.412G ~ 2.484G)
	South Communication	RS 485 (USB Type A)
Interaction	LED	LED Indicator x 2
	APP	Solplanet APP
Environment	Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)
	Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
	Relative Humidity (Non-condensing)	5% ~ 95%
	Max. Operating Altitude	4,000 m (13,123 ft.)
Electrical	DC Power Supply	5 ~ 12V
	Power Consumption	Typical 6.5 W, Max. 10 W
Mechanical	Dimensions (W x H x D)	50mm*34mm*154mm
	Weight	100g
	Protection Degree	IP66

Ai-Logger 1000 data logger

Ai-Logger 1000



Ai-Logger 1000 data logger allows Solplanet inverters to connect to the Solplanet Cloud. The inverter and meter data is collected and sent to the Solplanet Cloud via the internet to allow for easy PV plant monitoring.

Smart

- Smart zero export control design

Simple

- Easy to install on site

Reliable

- Adapt to various application scenarios

Technical Datasheet



Ai-Logger 1000

Device Management	Max. Number of Manageable Devices*	80
	Communication Interface	LAN x 1, 10 / 100 / 1000 Mbps COM x 3, 1000 m DI x 4, DO x 2
Interaction	LED	LED Indicator x 4 – COM 1-3, North communication
	WEB	Embedded Web
	USB	USB 2.0 x 1
	RST	1
Environment	Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)
	Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
	Relative Humidity (Non-condensing)	5% ~ 95%
	Max. Operating Altitude	4,000 m (13,123 ft.)
Electrical	DC Power Supply	12 V ~ 24 V / 2 A
	Power Consumption	Typical 8 W, Max. 15 W
Mechanical	Dimensions (W x H x D)	240 mm x 126 mm x 42 xmm
	Weight	453 g
	Protection Degree	IP20
	Installation Options	Wall Mounting, DIN Rail Mounting, Tabletop Mounting

* Each 485 interface can connect up to 30 inverters or 1 smart meter.

Wi-Fi stick connection & monitor set up for single and three phase inverters

Wi-Fi connection & monitor set up for hybrid inverters

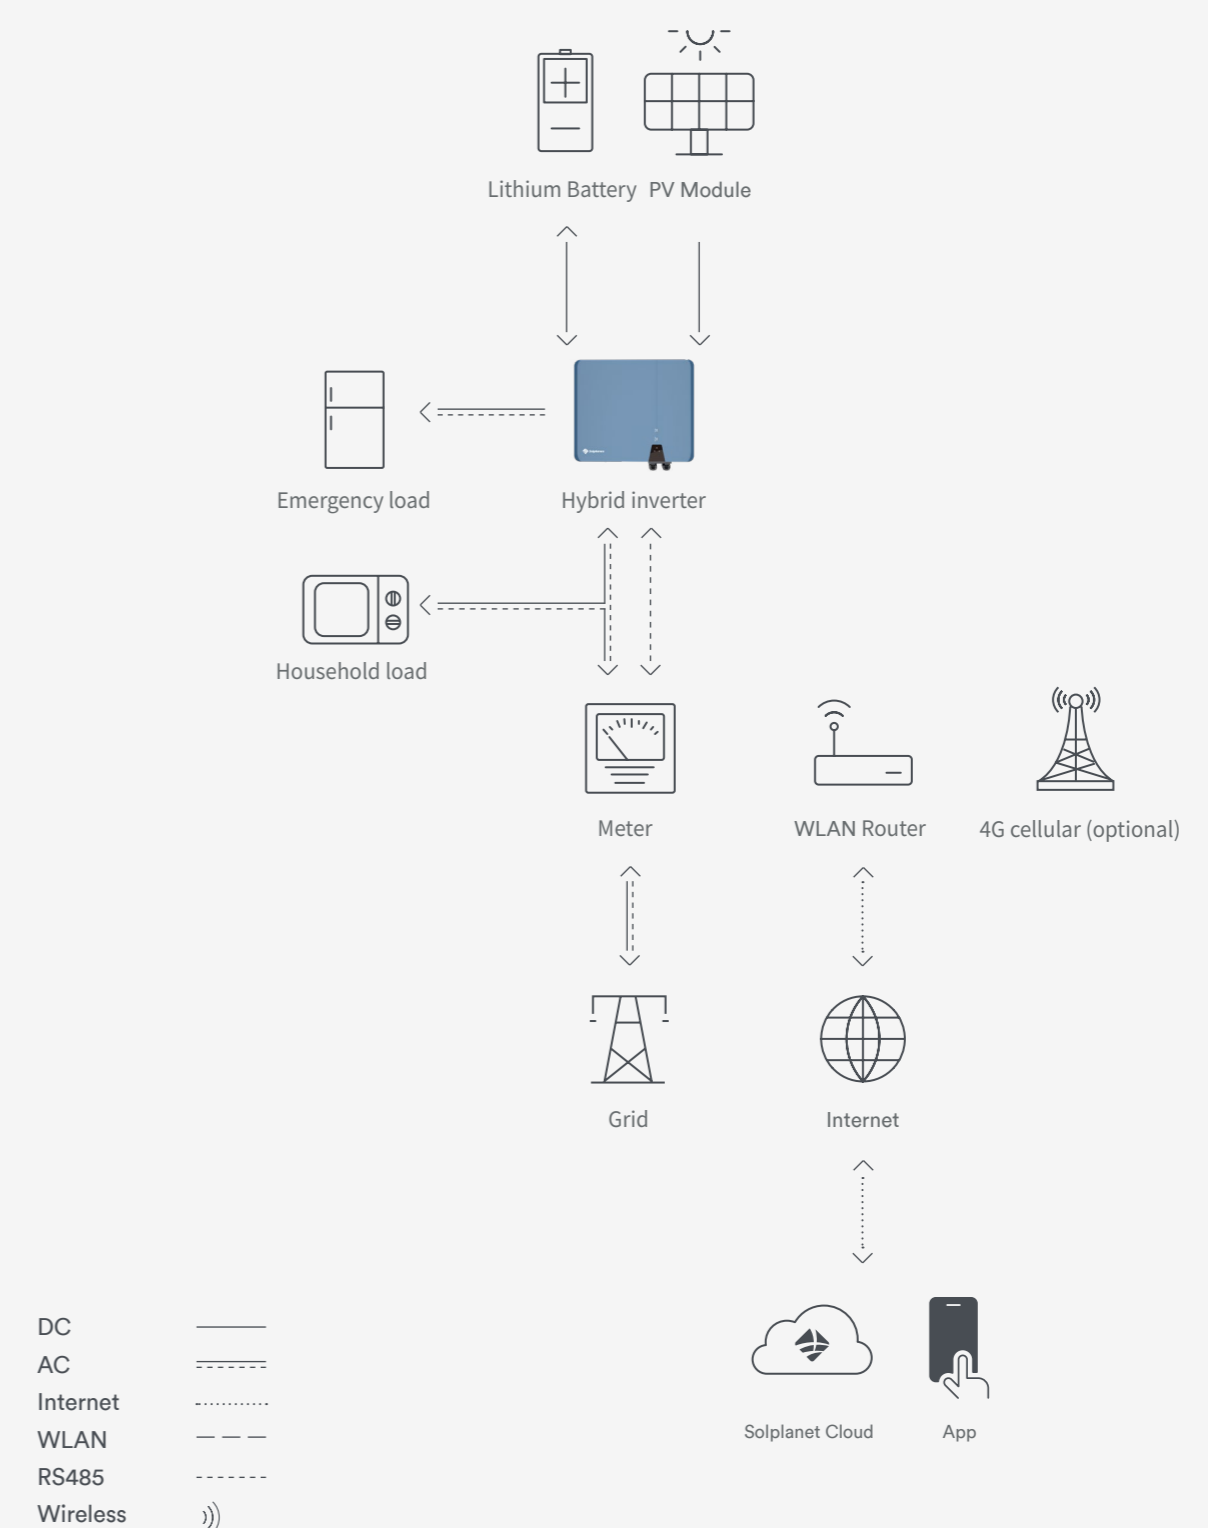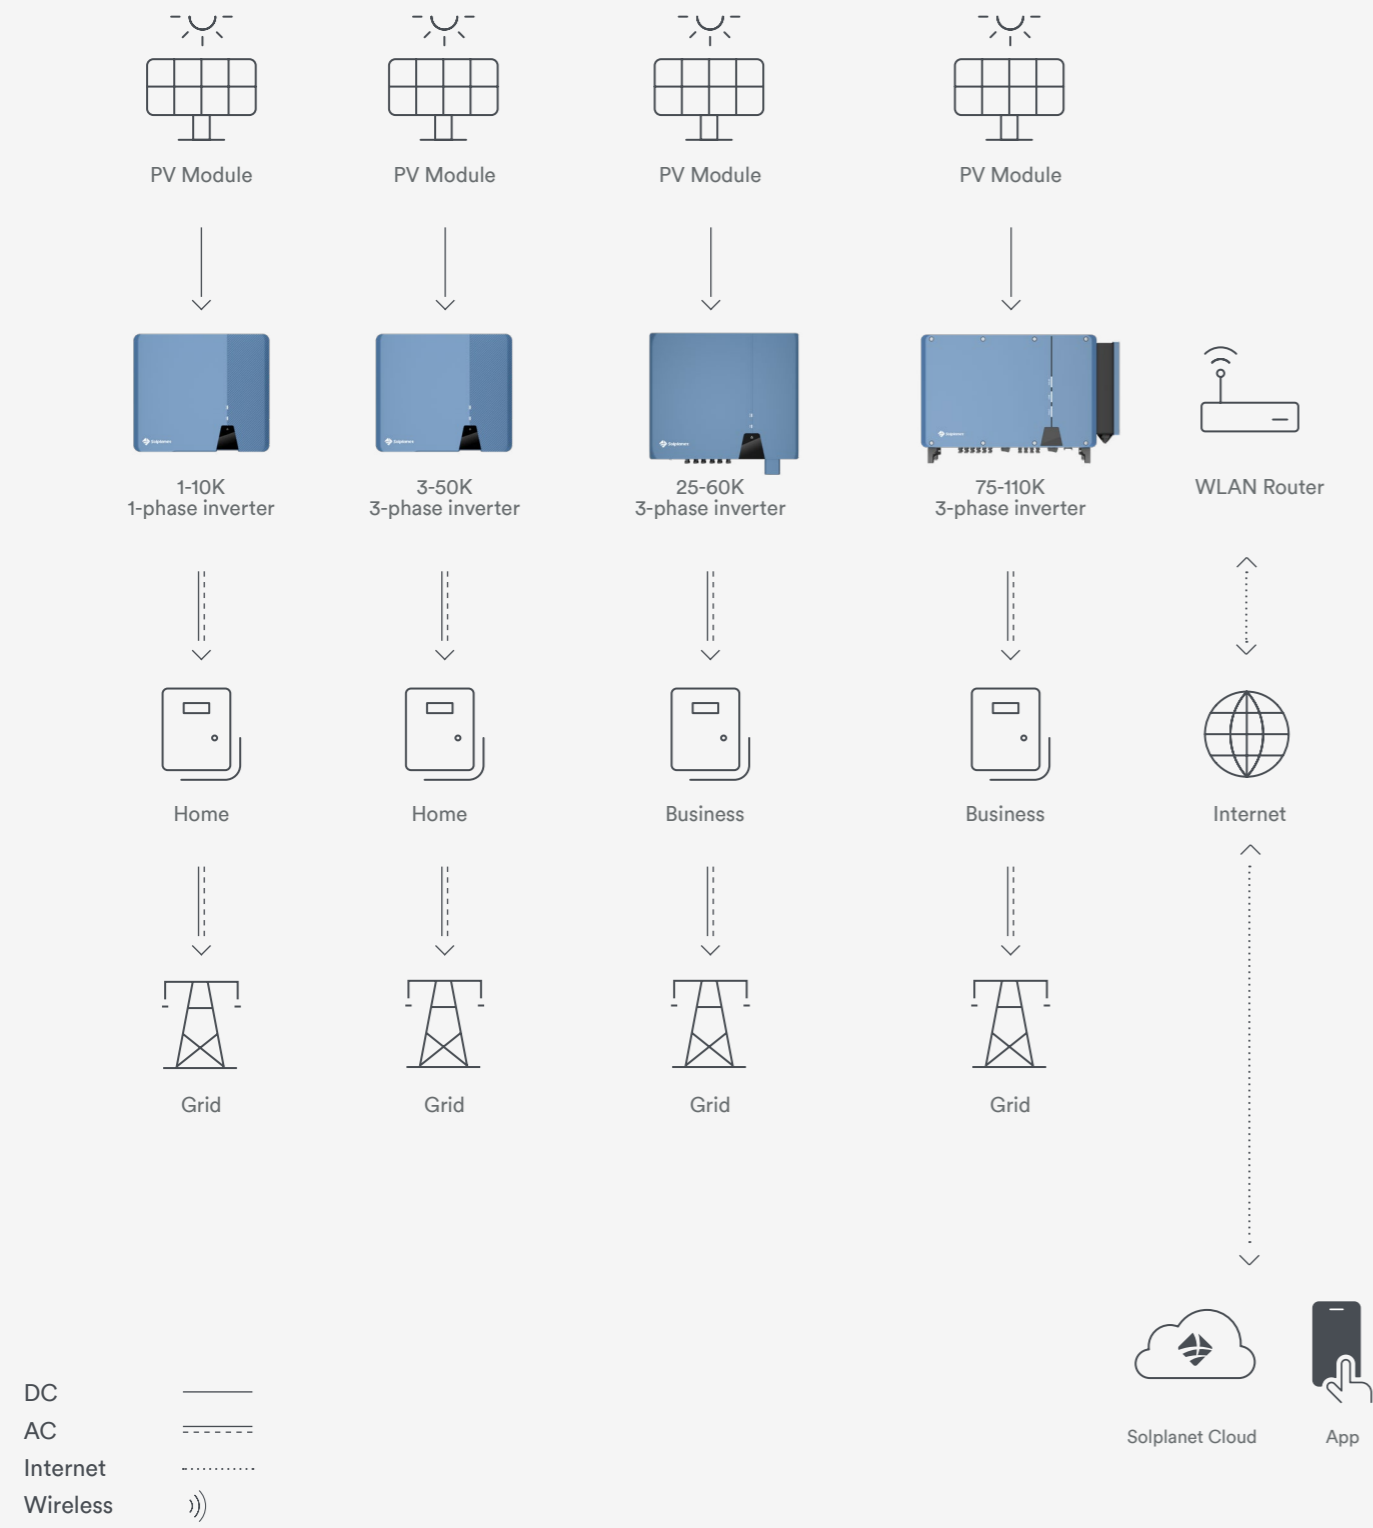

Internationally accredited laboratory

Our products are tested and certified according to strict international quality standards.

In addition to international quality test and certification of our products, our quality centre is also contributor and formulator of many international standards and the main drafting company of the China Quality Certification Center “Standards for Certification of Household Roof Solar System”.



www.solplanet.net

SOLPLANET INTERNATIONAL
info@solplanet.net
sales@solplanet.net
service.LATAM@solplanet.net
service.EMEA@solplanet.net
service.APAC@solplanet.net



Scan QR code and contact your local team

EN EU 202409/ All products and services described and all technical data are subject to change at any time without notice.
AISWEI assumes no liability for typographical and other errors.

Photo by Raja Tilikian