


Single phase inverters 5 to10 kW

# ASW S Series

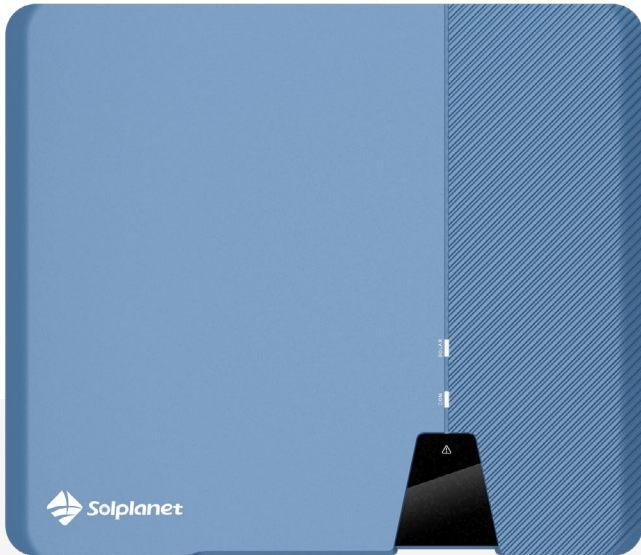

Models:

ASW5000-S-A

ASW6000-S-A

ASW8000-S-A

ASW10000-S-A



## Easy-to-install

- Toolless DC connection via Phoenix Contact connectors
- Quick setup and commissioning with AiSWEI apps
- Compact wall mount design



## Reliable

- International quality standards
- Integrated DC switch
- IP66 rated design for outdoor use



## User-friendly

- 16 A input current, compatible with bifacial and large area PV modules
- Online monitoring via Wi-Fi and AiSWEI apps
- 3 MPPT's for flexible PV array design

# Technical Datasheet

ASW5000-S-A ASW6000-S-A ASW8000-S-A ASW10000-S-A

Input (DC)	Max. PV array power	8000 Wp STC	9000 Wp STC	12000 Wp STC	15000 Wp STC
	Max. input voltage	600 V			
	MPP voltage range / rated input voltage	80 V - 560 V / 360 V			
	Min. input voltage	80 V			
	Initial. feed in voltage	100 V			
	Max. operating input current	16 A			
	Max. short circuit current	22.5 A			
	No. of independent MPPT inputs / strings per MPPT input	3 / 1			
Output (AC)	Rated active power	5000 W	6000 W	8000 W	9999 W
	Max. apparent power	5000 VA	6600 VA	8800 VA	9999 VA
	AC nominal voltage	220 V / 230 V / 240 V			
	AC voltage range	180 V to 295 V			
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz			
	AC Nominal output current	21.7 A	26.1 A	34.8 A	43.5 A
	Max. output current	21.7 A	30 A	40 A	45.5 A
	Adjustable power factor range	0.8 leading to 0.8 lagging			
	Feed-in phases	1			
	Harmonic distortion (THD) at rated output	< 3 %			
Efficiency & Protection	Max. efficiency / European efficiency	97.7 % / 97.3 %			
	DC switch	●			
	Ground fault monitoring / grid monitoring	● / ●			
	DC reverse polarity protection / AC short circuit Protection	● / ●			
	AC Overcurrent Protection	●			
	DC Surge Protection	Type II			
	AC Surge Protection	Type II			
	Residual Current Monitoring Unit	●			
	Anti-islanding Protection	●			
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II			
General data	Dimensions (W / H / D)	503 / 435 / 183 mm			
	Weight	18.5 kg			
	Operating temperature range	-25°C ... +60°C			
	Self-consumption (at night)	< 1 W			
	Topology	Non-isolated			
	Cooling concept	Natural convection			
	Degree of protection (according to IEC 60529)	IP66			
	Climatic category (according to IEC 60721-3-4)	4K4H			
	Max. permissible value for relative humidity (non-condensing)	100 %			
	Max. operating altitude	3000 m			
Features	EMC	CLASS B			
	Brand	Solplanet			
	DC connection	Phoenix Contact			
	AC connection	Plug-in Connector			
	LED indicators (Status / Fault/ Communication)	●			
	Communication interface(RS485/ WiFi/ 4G) <sup>1&amp;2</sup>	●/●/○			
	Modbus-Sunspec protocol	●			
	Country of Manufacture	China			
	Certificates and approvals (more available on request)	CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, AS/ NZS4777, C10/C11			
	Anti-islanding protection	Frquency shift			

● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

2- DRED supported with RS485 communication for Australia & New Zealand

Version: January 2022

