


Sol-CB125-LB/ Sol-CB250-LB

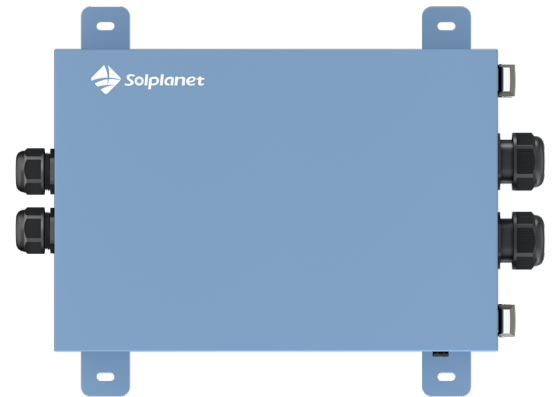

Technical Datasheet

		Sol-CB125-LB	Sol-CB250-LB
General Data	Compatible inverters	ASW 3-6k H-S2 Series	ASW 008/010K-SH Series
	Compatible batteries	Ai-LB-G3 Series Ai-LB-E Series	
	Parallel number	3 inputs, 1 output	
	Rated input / output voltage	51.2 V	
	Operating voltage range	42 V - 60 V	
	Maximum input current per battery tower	100 A DC	100 A DC
	Maximum output current	100 A DC	210 A DC
	Degree of protection	IP65	
	Installation location	Indoor / outdoor	
	Operating temperature range	-20 °C ~ 55 °C	
	Relative humidity	5 % - 95 %, non-condensing	
	Dimensions (L / W / H)	440 / 175 / 300 mm	
	Weight	6.0 kg	8.5 kg